

# TEST REPORT

Prepared For

## Shenzhen Brillloop Lighting Co., Ltd

6F, B6 Building, Junfeng Industrial Park, Yonghe Road, Fuyong, Bao'an District, Shenzhen City, Guangdong Province, P.R.China

**Model: BLP-FL24W04-3000-BK**

<b>Report Type:</b>	Report is prepared for the client above to present the result of measured temperature of samples and projected lumen maintenance life of LED lighting product according to projecting method from IES: IES TM-21-11
<b>Test Engineer:</b>	Carl Du <i>Carl Du</i>
<b>Report Number:</b>	R2DG160822053-10
<b>Test Date:</b>	2016-08-23
<b>Report Date:</b>	2016-08-25
<b>Reviewed By:</b>	Blake Zhang / EE Engineer <i>Blake Zhang</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Dongguan). Pu Long Cun 69, Puxinghu Industrial Area, Tangxia Town, Dongguan, Guangdong, P.R.China. Tel: +86-0769-86858888 Fax: +86-0769-86858588

**Note:** The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan)

(Rev. 2.0, 2012-10-05 effected) This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## 1. General Description

### Information of Final Products:

One sample was received on 2016-08-20 and used for testing.

Model Number: BLP-FL24W04-3000-BK  
 Model Name: LED Floodlight  
 Manufacturer: Shenzhen Brillloop Lighting Co., Ltd  
 Rated Voltage: 100-240V,50Hz  
 Test Voltage: 240V,50Hz  
 Rated Power: 24W

### Information of LED Light Source:

Model Number of LED Light Source: 2T03X5WW11000003  
 Manufacturer: Edison Opto Corporation  
 LM-80 Report No: Q131107

### Family Declaration:

The manufacture applied declaration to our Lab on Aug. 29<sup>th</sup> 2016 and declare that there are some differences between Multiple Models and testing products. Details as below:

Testing Model	Multiple Models	Differences	Details
BLP-FL24W04-3000-BK	BLP-FL24W04-XXXX-YY	CCT	XXXX is CCT, it can be 3000=3000K, 4000=4000K, 5700=5700K.
		color of enclosure	YY is the color of enclosure, it can be BK=Black, SL=Silver, WH=White, GR=Grey.

## 2. Standards Used

- IES TM-21-11 Projecting Long Term Lumen Maintenance of LED Light Sources
- ANSI/UL 1598-2008: Standard for Safety of Luminaires
- Annex A of IES LM-84-14 Recommendations for measurement of IN-SITU conditions LED case temperature

### 3. Test Method

Lumen maintenance life of LED light source and LED lamp or luminaire (if any) is the elapsed operating time over which an LED light source maintains a given percentage of its initial light output.  $L_{70}$  in this report is the time (in hours) when the light output from the LED has dropped to 70% of its initial output.

The LED light source is LED package, array, or module which is tested in IES LM-80-08 test report. Final product means LED lamp or luminaire which the LED light source will be included.  $TMP_{LED}$  is the temperature of the thermocouple attachment point on the LED light source package as defined by the manufacturer of the LED light source. The *in situ* temperature of LED light source used in final product was used to calculate the lumen maintenance life of final product, if any.

The *in situ* temperature is measured according to ANSI/UL 1598 and IES LM-84 Annex A. The LED which has the highest temperature was measured at the location of LED case which is specified by LED source manufacturer and detailed by LM-80 report. The hottest LED was found by the following procedure:

An IR thermography may be used to find the hottest LEDs. Or if the layout of PCB is symmetrical, the hottest LED should be at the center or close to the center of the array. Or in question, more than one TMP should be measured to find out the hottest LED. The case temperature of the hottest LED source at *in situ* condition is reported and is used to project  $L_{70}$  life time.

The reported temperature value for each point should be the readings of the hybrid recorder after the temperature of each point is stabilized and constant. A temperature is considered constant if the test has been running for at least 3 hours; and three successive readings, taken at 15-minute intervals, are within 1 degree C of one another and are not rising. Or the test was run for a minimum of 7.5 h. Ambient temperature variations above or below 25 °C have been respectively subtracted from or added to temperatures recorded at points on the device.

The drive current of LED package/module/ array was calculated as the total output current of the driver measured by multimeter, divided by the number of branches in parallel of LEDs.

The calculation of the  $L_{70}$  life is according to IES TM-21-11.


#### 4. Test Equipment

Device	Manufacture	Model No	Serial No	Test Range	Calibration date	Calibration due date
Multimeter	FLUKE	17B	1573 1328	400nV~4000nV, 4V~1000V	2016-03-04	2017-03-03
Hybrid Recorder	YOKOGAWA	DR240	10#	N/A	2016-03-04	2017-03-03
Power Supply	HengPu	HPA 1103	0003394	3KVA	2016-03-04	2017-03-03
Thermography	FLIR	E60	49037877	-20°C-120 °C 0°C-650 °C	N/A	N/A



Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

## 5. In situ Temperature and Driver Current Measurements of Final Product

IR thermograph from hot PCBAs of Sample

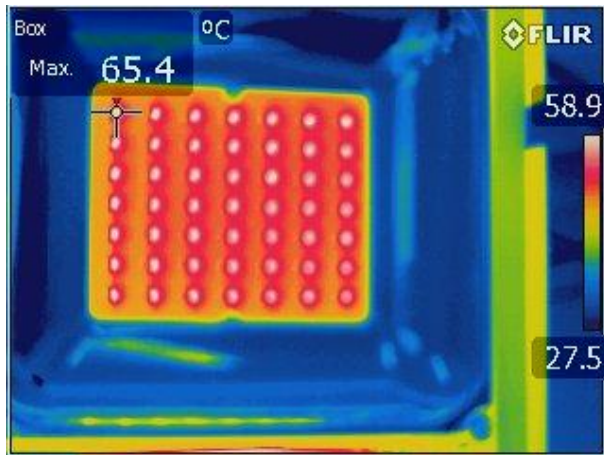

Temperature measurement point on TMPLED

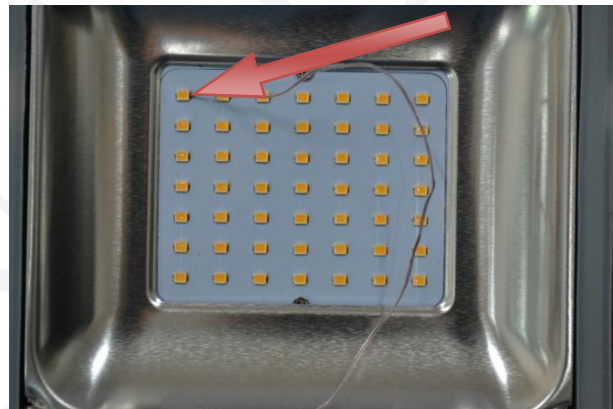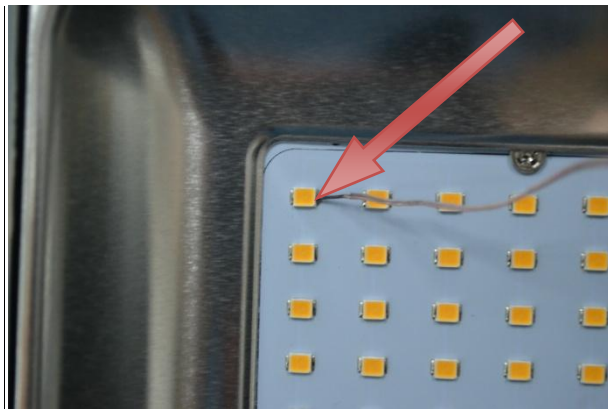

Temperature Measurement Data

### Test Condition

Ambient Temperature:	25°C±5°C
Relative Humidity:	56.8 %
Supply voltage:	240 V 50 Hz
Type of thermocouples:	T
Test Duration	≥3.5Hours

### Test Result

Hottest TMP <sub>LED</sub> :	51.2°C
Forward Current(I <sub>F</sub> ):	149 mA



## 6. Lumen Maintenance Data of LED Light Source from LM-80 Report

Test Data for 85°C Case Temperature		Test Data for 105°C Case Temperature	
Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)
1000	101.90	1000	100.80
2000	101.00	2000	99.80
3000	100.10	3000	99.40
4000	99.70	4000	98.90
5000	99.40	5000	98.10
6000	98.90	6000	97.70
7000	98.10	7000	96.80
8000	97.30	8000	96.40
9000	96.80	9000	95.70
10000	96.40	10000	94.50

## 7. Calculate Result of Life Time Projection

Temperature Interpolation at 51.2° C (projection based on in-situ temperature entered)	
$T_{s,1}$ (°C)	85.00
$T_{s,1}$ (K)	358.15
$\alpha_1$	6.452E-06
$B_1$	1.027
$T_{s,2}$ (°C)	N/A
$T_{s,2}$ (K)	N/A
$\alpha_2$	N/A
$B_2$	N/A
$E_a/k_b$	N/A
A	N/A
$B_0$	1.027
$T_{s,i}$ (°C)	51.20
$T_{s,i}$ (K)	324.35
$\alpha_i$	6.452E-06
<b>Reported <math>L_{70}(10k)</math> at 51.2° C (hours)</b>	<b>59000</b>

## 8. Final Product Photo

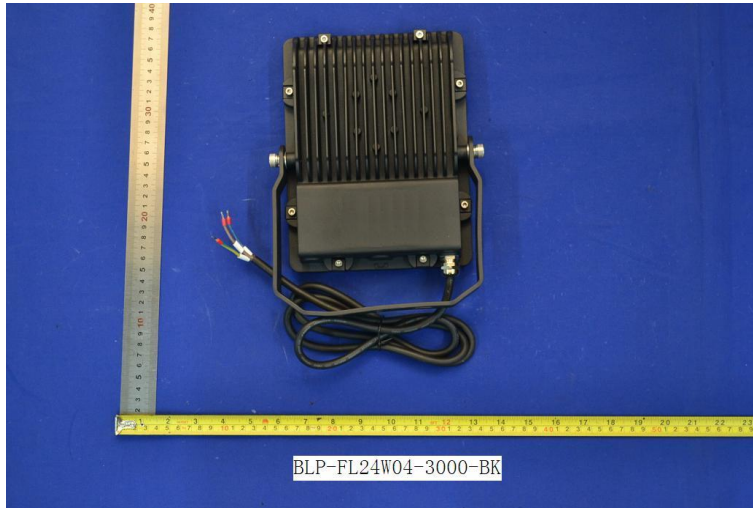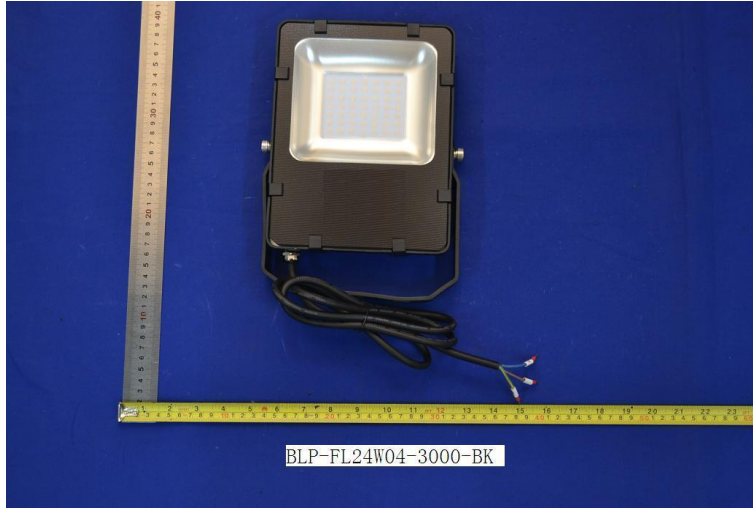

\*\*\*\*\*END OF REPORT\*\*\*\*\*