

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		841.0 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal

Beam Spread	At 10% of Imax	112.3V x 143.2H
	At 50% of Imax	37.7V x 89.3H
	At 90% of Imax	13.9V x 42.6H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	891.0 lumens per klm.
	To 50% of Imax	482.4 lumens per klm.
	To 90% of Imax	113.9 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 21 March 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.680m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.12V I:0.4430A P:100.02W PF:0.9811 Freq:50.00Hz Lamp Flux:14408.7x1 lm		
NAME: BLP-FL100W07	TYPE:	WEIGHT:7.2Kg
SPEC.:	DIM.: 0.340*0.400*0.090	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.28*0.25	Shielding Angle:

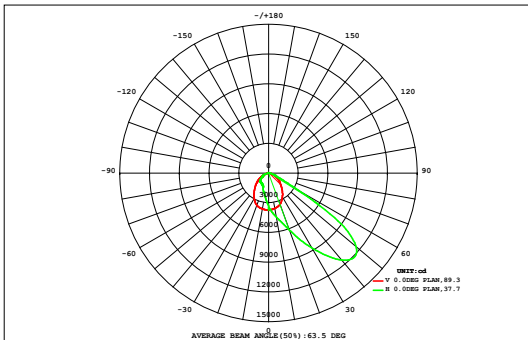

DATA OF LAMP		Eff:144.05lm/W	
MODEL		Imax (cd)	12118
NOMINAL POWER (W)	100	AVAILABILITY (%)	89.8
RATED VOLTAGE (V)	230	Avai. FLUX (lm)	12945
NOMINAL FLUX (lm)	14408.7	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	14409
TEST VOLTAGE (V)	230	θ @50% (H,V)	89,38DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.05	0.09	0.12	0.15	0.17	0.18	0.18	0.18	0.19	0.18	0.16	0.12	0.08	0.05	0.02	0.01	1.95	0.00
90	0.01	0.02	0.05	0.09	0.12	0.15	0.17	0.18	0.18	0.18	0.19	0.18	0.16	0.12	0.08	0.05	0.02	0.01	1.95	0.00
80	0.01	0.06	0.20	0.54	1.13	1.97	2.94	4.14	5.34	5.23	3.84	2.57	1.70	1.00	0.51	0.20	0.06	0.01	31.4	0.00
70	0.01	0.14	0.82	2.53	5.38	8.92	12.0	15.6	19.1	19.0	15.3	11.6	8.47	4.99	2.43	0.82	0.16	0.02	127	0.00
60	0.02	0.34	2.09	5.79	11.4	17.2	22.2	26.2	28.2	28.1	25.7	21.7	16.8	11.1	5.67	2.13	0.38	0.03	225	0.00
50	0.03	0.68	3.61	9.03	16.3	23.3	29.6	34.2	36.6	36.6	34.2	29.5	23.2	16.1	8.97	3.71	0.76	0.04	306	51.7
40	0.04	1.07	5.16	11.8	19.7	27.2	33.0	37.1	39.2	39.1	37.0	33.0	27.0	19.6	11.9	5.37	1.18	0.05	349	171
30	0.05	1.43	6.60	14.8	22.6	31.2	38.3	43.1	44.9	44.1	41.3	36.6	29.9	22.2	15.2	6.98	1.59	0.06	401	282
	0.06	1.73	7.82	17.9	28.4	39.6	50.1	58.6	60.7	57.8	52.4	45.4	37.1	28.6	18.6	8.40	1.92	0.08	515	451
	0.07	1.91	8.68	20.6	35.6	54.3	72.4	86.0	90.4	80.3	77.2	70.7	55.2	37.2	21.9	9.49	2.15	0.09	724	684
	0.07	2.38	10.9	25.6	45.1	69.0	91.5	105	112	126	123	106	79.7	51.8	29.4	13.0	2.71	0.10	993	966
	0.08	3.02	14.3	32.2	56.1	83.8	114	137	151	161	161	143	108	70.5	40.4	18.7	3.46	0.10	1297	1279
	0.08	3.25	16.8	37.0	68.2	113	156	191	214	224	219	190	143	88.3	49.8	22.8	3.70	0.09	1740	1726
-30	0.06	2.95	18.2	41.5	90.7	149	208	264	294	305	294	245	183	111	58.5	23.2	3.34	0.07	2290	2277
-40	0.04	2.21	16.3	45.4	103	178	250	321	351	358	338	274	200	115	57.4	19.2	2.49	0.05	2630	2616
-50	0.03	1.28	10.9	35.4	83.6	143	199	251	258	255	239	187	137	81.1	37.5	12.2	1.43	0.03	1933	1913
-60	0.02	0.46	4.86	17.3	41.0	61.6	68.2	68.7	57.7	53.0	57.2	56.9	52.7	36.7	17.3	5.25	0.51	0.02	599	525
-70	0.01	0.10	0.92	4.30	11.0	16.1	17.3	16.8	14.6	13.9	14.7	14.8	14.0	9.63	4.00	0.93	0.11	0.01	153	2.88
-80	0.01	0.03	0.09	0.23	0.58	0.90	1.03	1.08	1.02	0.95	0.90	0.80	0.68	0.42	0.19	0.09	0.03	0.01	9.03	0.00
-90	0.01	0.03	0.09	0.23	0.58	0.90	1.03	1.08	1.02	0.95	0.90	0.80	0.68	0.42	0.19	0.09	0.03	0.01	9.03	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.68	23.1	128	322	640	1018	1365	1661	1778	1808	1734	1468	1117	705	380	153	26.0	0.85	14326	---
Φ a	0.00	0.00	46.9	232	543	914	1259	1561	1685	1716	1636	1360	1006	610	296	79.7	0.00	0.00	---	12945


one-half-peak spread: U:11.6,D:26.4 , L:46.0,R:43.0 NEMA Beam Type: Type 7 x 6 (H x V)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:21 March 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.12V I:0.4430A P:100.02W PF:0.9811 Freq:50.00Hz Lamp Flux:14408.7x1 lm		
NAME: BLP-FL100W07	TYPE:	WEIGHT:7.2Kg
SPEC.:	DIM.: 0.340*0.400*0.090	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.28*0.25	Shielding Angle:

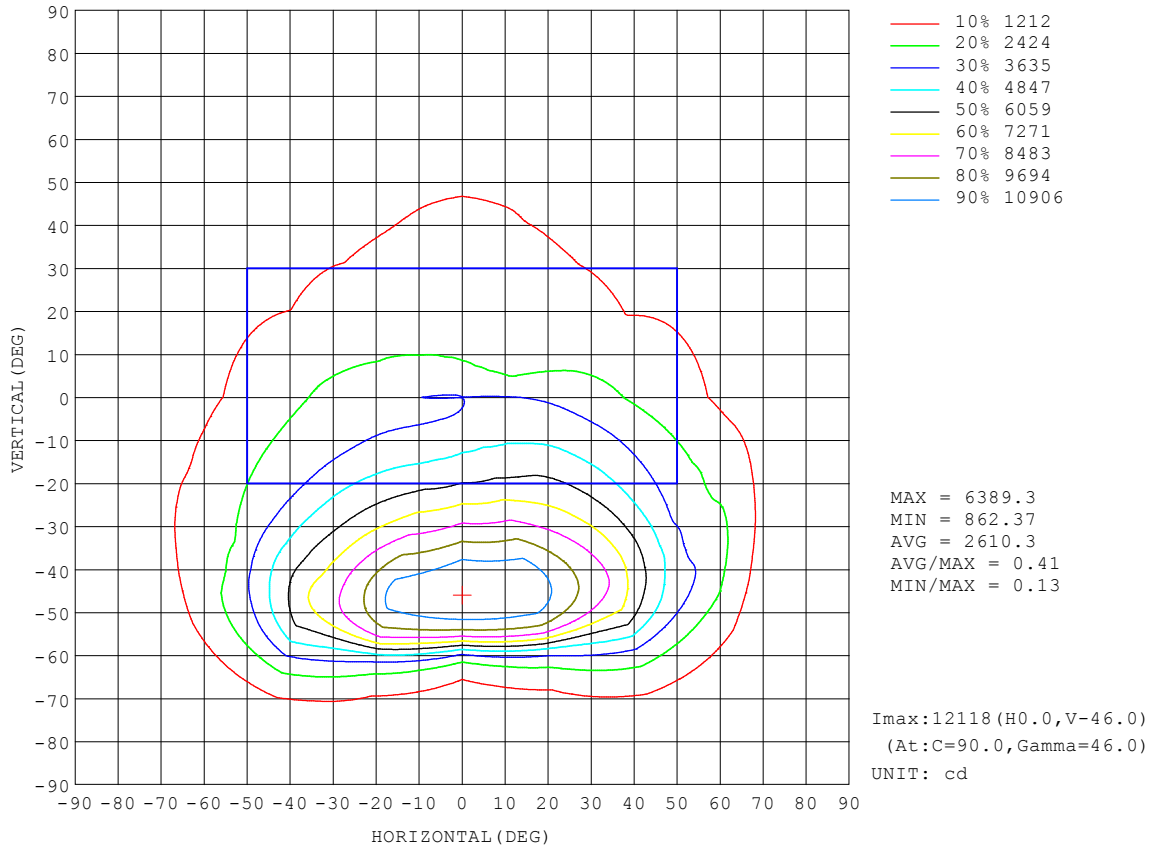


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:21 March 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:230.12V I:0.4430A P:100.02W PF:0.9811 Freq:50.00Hz Lamp Flux:14408.7x1 lm		
NAME: BLP-FL100W07	TYPE:	WEIGHT:7.2Kg
SPEC.:	DIM.: 0.340*0.400*0.090	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.28*0.25	Shielding Angle:

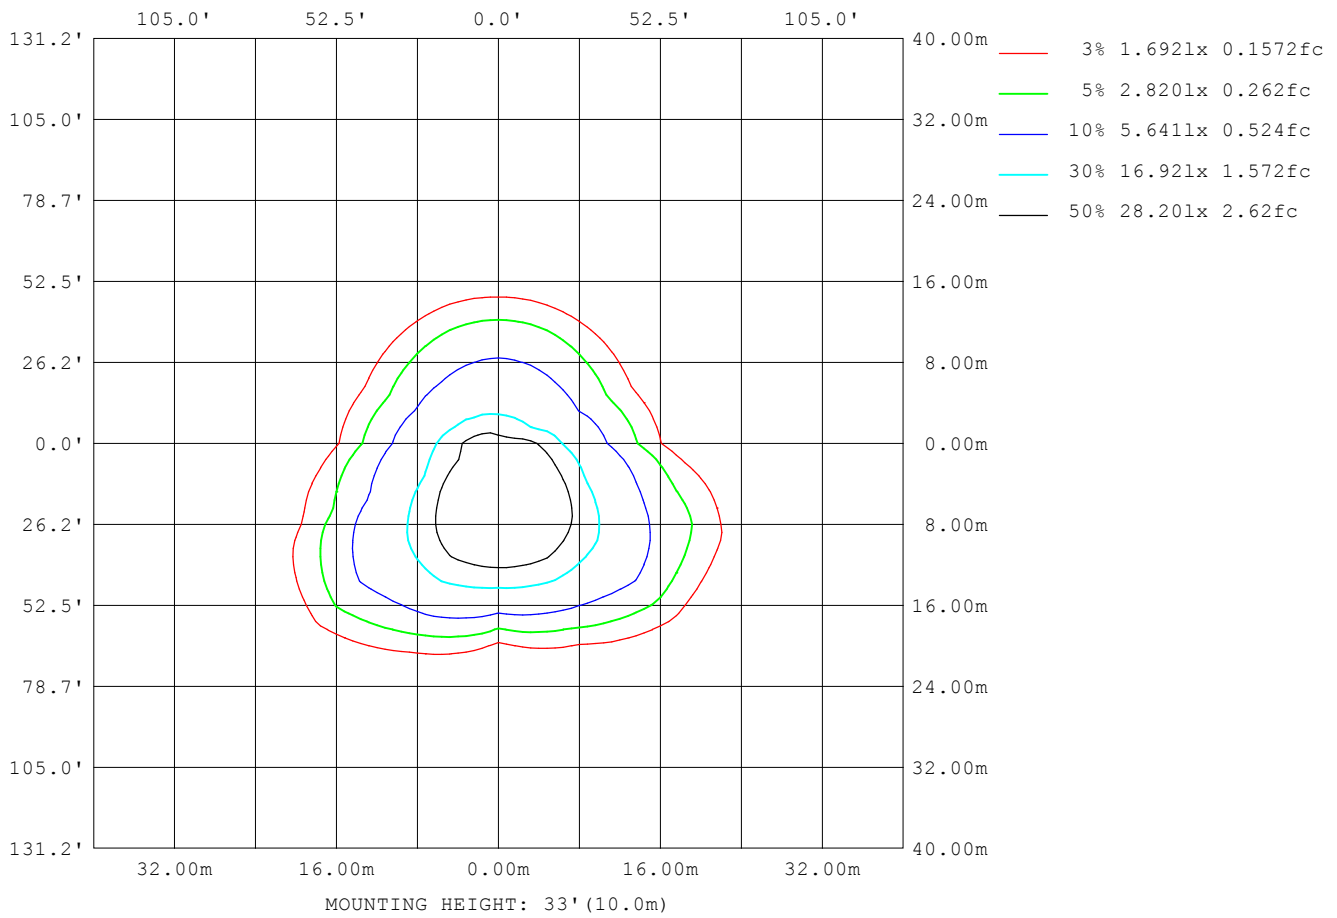

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:21 March 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

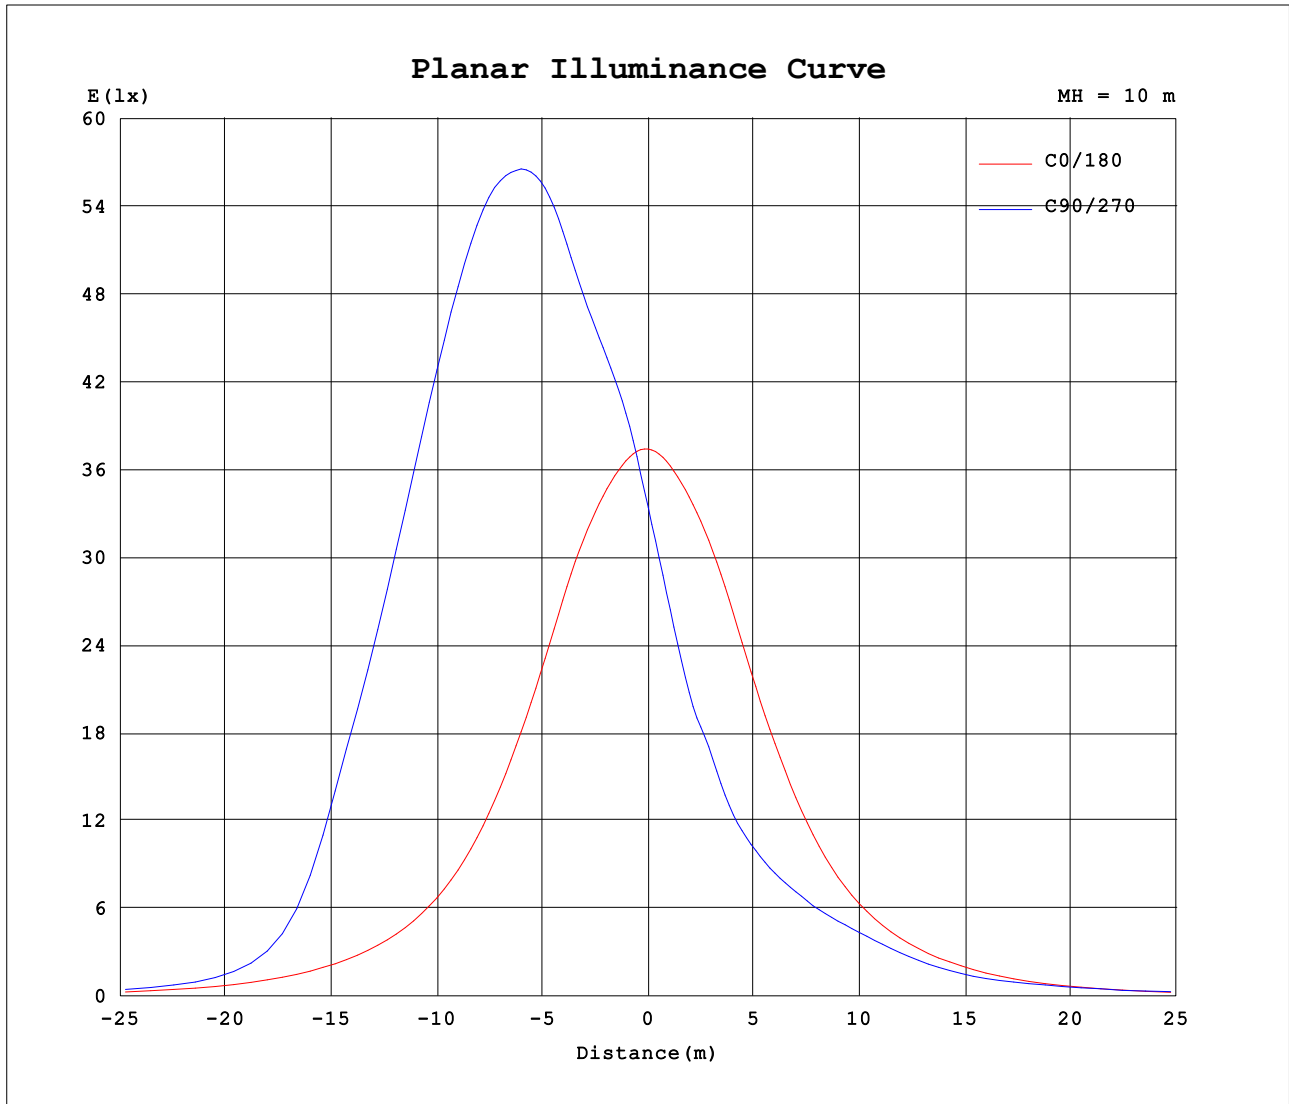


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 21 March 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.12V I:0.4430A P:100.02W PF:0.9811 Freq:50.00Hz Lamp Flux:14408.7x1 lm		
NAME: BLP-FL100W07	TYPE:	WEIGHT:7.2Kg
SPEC.:	DIM.: 0.340*0.400*0.090	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.28*0.25	Shielding Angle:

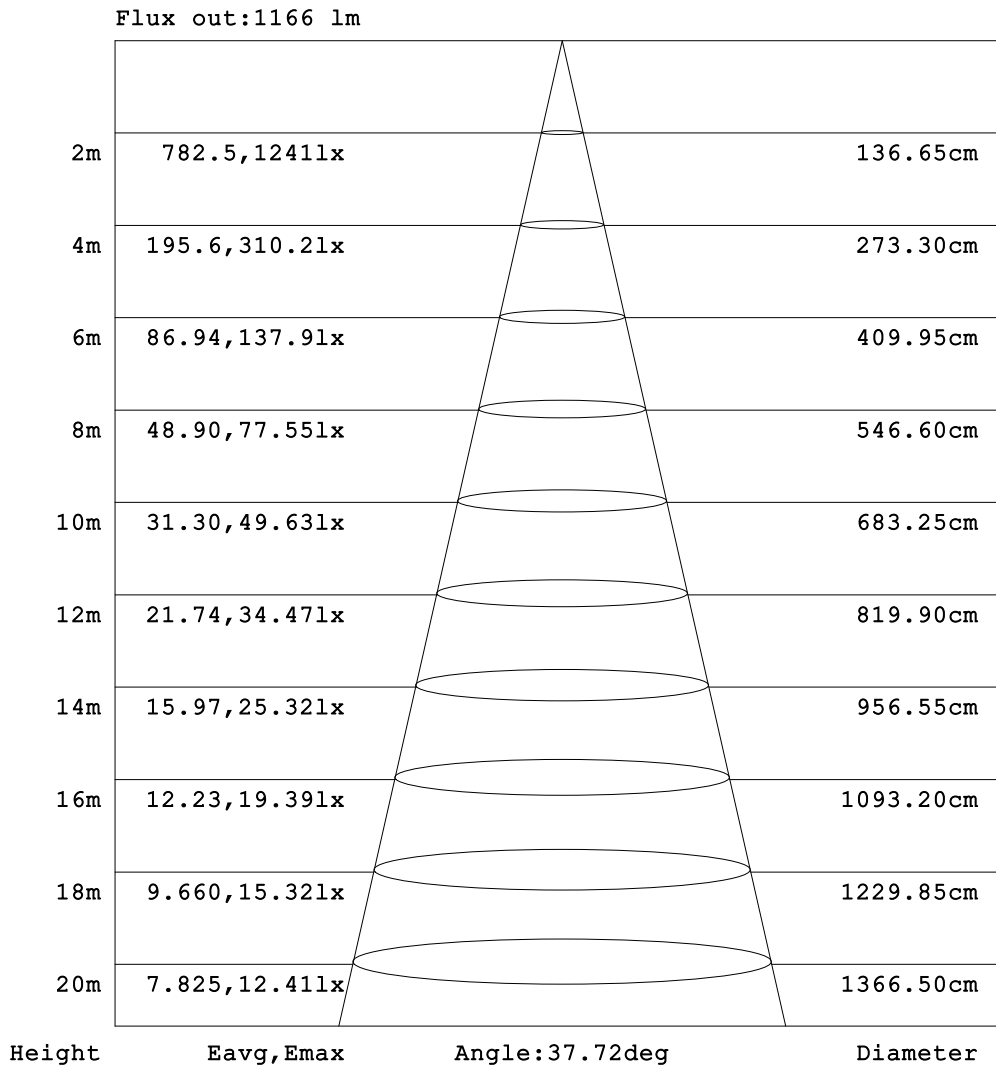

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:21 March 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.12V I:0.4430A P:100.02W PF:0.9811 Freq:50.00Hz Lamp Flux:14408.7x1 lm		
NAME: BLP-FL100W07	TYPE:	WEIGHT:7.2Kg
SPEC.:	DIM.: 0.340*0.400*0.090	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.28*0.25	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.14	0.21	0.31	0.44	0.59	0.75	0.92	1.10	1.27	1.44	1.59	1.73	1.86	1.98	2.09	2.18	2.26	2.30	2.31
-170	0.14	0.21	0.30	0.41	0.54	0.67	0.79	0.92	1.03	1.12	1.19	1.23	1.25	1.24	1.26	1.32	1.35	1.39	1.45
-160	0.14	0.20	0.28	0.38	0.47	0.57	0.65	0.72	0.77	0.80	0.79	0.86	0.91	0.96	1.00	1.04	1.07	1.09	1.11
-150	0.14	0.20	0.26	0.33	0.40	0.47	0.51	0.54	0.54	0.60	0.65	0.70	0.73	0.76	0.80	0.82	0.84	0.86	0.86
-140	0.14	0.19	0.24	0.29	0.34	0.37	0.39	0.41	0.46	0.50	0.53	0.56	0.59	0.62	0.64	0.66	0.68	0.68	0.69
-130	0.14	0.18	0.21	0.25	0.27	0.29	0.31	0.34	0.37	0.40	0.42	0.45	0.48	0.50	0.52	0.54	0.55	0.55	0.55
-120	0.14	0.17	0.19	0.21	0.22	0.22	0.25	0.27	0.29	0.31	0.33	0.35	0.37	0.39	0.40	0.42	0.42	0.43	0.43
-110	0.14	0.16	0.16	0.17	0.17	0.17	0.19	0.20	0.21	0.22	0.23	0.25	0.26	0.27	0.28	0.29	0.29	0.30	0.30
-100	0.14	0.15	0.15	0.14	0.14	0.13	0.14	0.14	0.14	0.15	0.15	0.16	0.16	0.16	0.17	0.17	0.17	0.17	0.17
-90	0.14	0.15	0.16	0.16	0.17	0.19	0.22	0.25	0.28	0.31	0.33	0.35	0.38	0.40	0.41	0.40	0.40	0.39	0.39
-80	0.14	0.19	0.36	0.65	1.03	1.48	2.13	3.90	7.45	12.0	13.9	15.3	16.3	15.9	15.7	15.9	15.2	14.0	12.2
-70	0.14	0.29	0.81	1.64	5.64	17.3	33.0	52.7	77.5	107	124	131	133	124	113	109	101	89.1	75.3
-60	0.14	0.45	1.41	7.19	25.2	55.7	96.4	146	207	285	373	399	415	431	464	476	459	412	342
-50	0.14	0.63	2.86	17.3	48.5	102	170	242	328	458	602	712	802	905	1017	1087	1111	1134	1151
-40	0.14	0.82	5.32	26.2	69.7	135	198	241	345	466	580	668	755	852	951	1048	1069	1101	1145
-30	0.14	0.98	7.50	32.6	80.5	141	174	217	271	366	449	522	587	651	713	766	806	829	870
-20	0.14	1.10	8.48	34.2	77.8	122	158	199	241	282	320	383	439	484	519	547	568	583	609
-10	0.14	1.17	8.03	30.0	64.4	96.0	129	167	201	236	271	305	334	354	377	397	412	427	450
0	0.14	1.17	6.43	22.0	43.0	67.6	95.4	124	151	179	212	247	281	312	337	353	363	370	374
10	0.14	1.13	6.02	20.7	40.4	63.0	87.0	111	130	148	168	188	201	212	228	239	240	238	228
20	0.14	1.04	5.03	17.9	35.3	55.2	75.1	94.4	107	116	122	137	151	156	162	169	169	170	166
30	0.14	0.90	3.70	14.0	28.4	45.0	61.4	75.9	87.0	97.5	108	116	122	126	130	133	134	135	135
40	0.14	0.72	2.49	9.41	20.5	33.3	46.4	59.3	72.9	85.1	94.2	103	110	115	119	121	123	125	126
50	0.14	0.54	1.70	5.00	12.4	21.3	31.2	42.4	54.0	65.4	75.3	83.0	89.7	96.3	102	107	110	112	113
60	0.14	0.37	1.07	2.20	5.19	10.4	16.1	22.7	30.4	39.1	46.9	52.7	58.5	63.5	66.9	71.6	74.6	76.3	77.2
70	0.14	0.25	0.57	1.05	1.68	2.70	4.49	6.82	9.40	12.2	15.6	19.6	22.8	25.1	29.9	35.7	40.9	45.9	50.3
80	0.14	0.19	0.27	0.38	0.52	0.67	0.84	1.02	1.21	1.39	1.57	1.72	1.84	1.91	2.00	2.08	2.11	2.09	2.01
90	0.14	0.18	0.22	0.25	0.29	0.32	0.34	0.36	0.38	0.40	0.37	0.35	0.32	0.30	0.28	0.26	0.25	0.24	0.23
100	0.14	0.19	0.25	0.31	0.39	0.46	0.54	0.62	0.71	0.81	0.83	0.85	0.86	0.87	0.88	0.88	0.87	0.85	0.83
110	0.14	0.20	0.28	0.38	0.50	0.63	0.78	0.94	1.13	1.33	1.47	1.59	1.72	1.84	1.95	2.01	2.06	2.09	2.10
120	0.14	0.22	0.31	0.44	0.60	0.79	1.01	1.25	1.52	1.81	2.09	2.31	2.55	2.79	3.02	3.14	3.25	3.34	3.41
130	0.14	0.22	0.34	0.50	0.69	0.92	1.18	1.48	1.80	2.13	2.46	2.76	3.03	3.29	3.53	3.71	3.84	3.95	4.05
140	0.14	0.23	0.36	0.53	0.74	1.00	1.28	1.60	1.94	2.29	2.63	2.98	3.28	3.52	3.73	3.91	3.99	4.04	4.08
150	0.14	0.23	0.36	0.54	0.76	1.01	1.30	1.62	1.98	2.33	2.67	3.01	3.36	3.66	3.84	4.02	4.13	4.11	4.09
160	0.14	0.23	0.36	0.53	0.74	0.98	1.24	1.54	1.86	2.20	2.52	2.80	3.05	3.29	3.49	3.59	3.65	3.60	3.50
170	0.14	0.22	0.34	0.49	0.68	0.88	1.11	1.36	1.62	1.87	2.11	2.31	2.49	2.64	2.78	2.88	2.96	2.88	2.67
180	0.14	0.21	0.31	0.44	0.59	0.75	0.92	1.10	1.27	1.44	1.59	1.73	1.86	1.98	2.09	2.18	2.26	2.30	2.31

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:21 March 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.12V I:0.4430A P:100.02W PF:0.9811 Freq:50.00Hz Lamp Flux:14408.7x1 lm		
NAME: BLP-FL100W07	TYPE:	WEIGHT:7.2Kg
SPEC.:	DIM.: 0.340*0.400*0.090	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.28*0.25	Shielding Angle:

Table--2

UNIT: ×10cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.29	2.25	2.19	2.10	2.00	1.89	1.76	1.62	1.46	1.30	1.13	0.96	0.78	0.62	0.47	0.34	0.23	0.16
-170	1.57	1.61	1.61	1.56	1.51	1.45	1.38	1.30	1.20	1.09	0.97	0.84	0.70	0.57	0.44	0.32	0.23	0.16
-160	1.15	1.16	1.17	1.14	1.13	1.09	1.03	0.95	0.91	0.85	0.78	0.70	0.61	0.51	0.40	0.31	0.22	0.16
-150	0.87	0.87	0.87	0.86	0.83	0.82	0.79	0.75	0.69	0.63	0.60	0.56	0.51	0.44	0.36	0.28	0.21	0.16
-140	0.69	0.69	0.68	0.67	0.65	0.63	0.60	0.59	0.55	0.51	0.46	0.44	0.41	0.36	0.31	0.25	0.20	0.16
-130	0.55	0.55	0.54	0.53	0.52	0.50	0.47	0.45	0.43	0.41	0.38	0.34	0.32	0.30	0.27	0.23	0.19	0.16
-120	0.43	0.43	0.42	0.41	0.40	0.38	0.36	0.34	0.33	0.31	0.29	0.27	0.25	0.24	0.22	0.20	0.18	0.16
-110	0.30	0.30	0.29	0.29	0.28	0.27	0.25	0.24	0.23	0.22	0.21	0.20	0.19	0.19	0.18	0.18	0.17	0.16
-100	0.17	0.17	0.17	0.17	0.17	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.16	0.16	0.16
-90	0.38	0.37	0.35	0.34	0.32	0.30	0.27	0.25	0.23	0.21	0.20	0.18	0.17	0.16	0.16	0.16	0.16	0.16
-80	13.0	13.3	13.1	12.5	12.6	12.8	11.7	10.4	8.84	5.57	2.95	1.85	1.46	1.07	0.72	0.42	0.22	0.16
-70	84.0	90.9	95.4	97.0	107	114	116	112	96.5	73.3	52.1	33.0	18.5	6.05	1.80	0.98	0.38	0.16
-60	380	396	388	366	365	361	345	320	257	199	149	103	62.3	27.7	7.99	1.65	0.61	0.16
-50	1145	1132	1110	1045	939	835	739	624	478	365	274	198	115	54.3	19.4	3.27	0.85	0.16
-40	1135	1135	1140	1059	976	897	807	676	544	418	357	269	161	79.2	29.9	6.23	1.08	0.16
-30	866	880	867	831	786	730	657	567	463	364	300	267	177	92.5	36.8	8.90	1.29	0.16
-20	617	634	638	633	599	555	496	421	363	307	260	214	164	90.9	38.3	10.2	1.44	0.16
-10	465	476	476	470	445	414	377	332	286	241	200	160	126	74.1	34.1	9.85	1.53	0.16
0	373	368	361	348	324	294	260	224	191	161	133	104	74.9	47.4	24.9	8.23	1.55	0.16
10	217	208	205	193	194	193	183	169	153	135	117	93.7	68.6	44.2	23.3	7.63	1.50	0.16
20	163	158	154	149	146	138	127	117	115	109	97.8	79.3	58.8	38.4	20.1	6.35	1.37	0.16
30	135	133	131	129	124	120	114	106	96.2	86.2	77.0	63.4	47.3	30.5	15.7	4.70	1.20	0.16
40	125	124	122	119	116	109	102	93.8	84.6	72.3	59.0	47.0	34.6	21.8	10.7	3.13	0.98	0.16
50	112	109	106	101	95.1	88.8	82.2	74.0	64.1	53.2	42.0	31.2	21.9	13.2	5.77	2.03	0.75	0.16
60	75.8	73.6	70.1	65.0	61.5	56.3	51.1	45.1	37.1	29.0	22.1	16.0	10.5	5.53	2.54	1.30	0.52	0.16
70	45.9	40.5	34.3	27.9	24.3	21.6	17.3	13.8	10.8	8.70	6.46	4.33	2.67	1.78	1.19	0.70	0.33	0.16
80	2.04	2.01	1.94	1.82	1.72	1.66	1.55	1.42	1.23	1.12	0.99	0.83	0.65	0.50	0.41	0.31	0.21	0.16
90	0.25	0.27	0.29	0.32	0.34	0.36	0.38	0.40	0.43	0.39	0.36	0.33	0.29	0.26	0.24	0.21	0.19	0.16
100	0.87	0.91	0.94	0.96	0.95	0.92	0.89	0.86	0.82	0.71	0.61	0.51	0.43	0.35	0.29	0.24	0.19	0.16
110	2.10	2.09	2.05	2.01	1.89	1.74	1.60	1.46	1.30	1.09	0.90	0.73	0.58	0.46	0.36	0.28	0.21	0.16
120	3.34	3.25	3.14	3.01	2.75	2.49	2.23	1.99	1.71	1.43	1.17	0.93	0.72	0.56	0.42	0.31	0.22	0.16
130	3.93	3.81	3.68	3.47	3.18	2.88	2.59	2.27	1.94	1.62	1.33	1.06	0.84	0.64	0.47	0.34	0.23	0.16
140	3.93	3.79	3.65	3.40	3.15	2.90	2.62	2.30	1.98	1.67	1.37	1.12	0.91	0.70	0.51	0.35	0.24	0.16
150	3.88	3.70	3.44	3.17	2.92	2.66	2.39	2.11	1.82	1.55	1.36	1.15	0.94	0.72	0.53	0.37	0.24	0.16
160	3.26	3.06	2.83	2.62	2.43	2.22	2.01	1.80	1.66	1.50	1.32	1.13	0.92	0.72	0.53	0.37	0.24	0.16
170	2.44	2.27	2.13	1.98	1.90	1.88	1.82	1.72	1.58	1.42	1.24	1.06	0.87	0.68	0.51	0.36	0.24	0.16
180	2.29	2.25	2.19	2.10	2.00	1.89	1.76	1.62	1.46	1.30	1.13	0.96	0.78	0.62	0.47	0.34	0.23	0.16

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:21 March 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks: