

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		357.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal

Beam Spread	At 10% of Imax	143.8V x 147.7H
	At 50% of Imax	116.5V x 116.7H
	At 90% of Imax	53.1V x 54.0H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	983.5 lumens per klm.
	To 50% of Imax	810.7 lumens per klm.
	To 90% of Imax	235.3 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 19 January 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity: 65.0%  
 Test Distance: 7.680m [K=1.0000]  
 Remarks:

**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.12V I:0.1684A P:29.347W PF:0.7571 Freq:50.01Hz Lamp Flux:3793.57x1 lm		
NAME: BLP-SFL30WA	TYPE:	WEIGHT:0.898KG
SPEC.:	DIM.: 0.133*0.168*0.040	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.10X0.09	Shielding Angle:

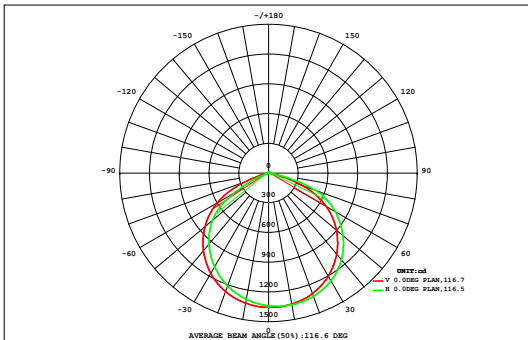

DATA OF LAMP		Eff:129.27lm/W	
MODEL		I <sub>max</sub> (cd)	1355
NOMINAL POWER (W)	30	AVAILABILITY (%)	98.3
RATED VOLTAGE (V)	230	Avai. FLUX (lm)	3730
NOMINAL FLUX (lm)	3793.57	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	3794
TEST VOLTAGE (V)	230	θ @50% (H,V)	117,116DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.11	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.00	0.00	0.92	0.00
90	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.11	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.00	0.00	0.92	0.00
80	0.00	0.03	0.09	0.20	0.36	0.57	0.67	0.69	0.72	0.69	0.61	0.51	0.37	0.23	0.12	0.05	0.01	0.00	5.91	0.00
70	0.01	0.06	0.32	1.35	2.89	4.50	5.41	6.11	6.31	6.01	5.25	4.20	3.07	1.67	0.65	0.15	0.03	0.00	48.0	36.8
60	0.01	0.11	1.39	4.38	8.19	11.8	14.6	16.9	17.8	17.5	15.9	13.3	10.1	6.32	2.89	0.65	0.06	0.00	142	140
50	0.01	0.30	2.92	7.48	12.4	17.2	21.2	24.1	25.5	25.3	23.4	20.1	15.8	10.9	5.83	1.80	0.12	0.01	214	213
40	0.02	0.61	4.33	9.74	15.5	21.1	25.8	29.2	30.8	30.5	28.4	24.7	19.7	14.1	8.30	3.05	0.27	0.01	266	265
30	0.02	0.92	5.44	11.5	17.9	24.2	29.5	33.2	35.0	34.7	32.4	28.3	22.8	16.5	10.2	4.17	0.47	0.01	307	306
	0.02	1.17	6.23	12.8	19.7	26.4	32.2	36.2	38.1	37.7	35.3	31.0	25.1	18.4	11.5	5.01	0.64	0.01	338	337
	0.02	1.32	6.70	13.6	20.9	27.9	34.0	38.2	40.1	39.7	37.3	33.0	26.8	19.7	12.4	5.51	0.75	0.01	358	357
	0.02	1.35	6.85	13.8	21.3	28.4	34.4	38.6	40.6	40.8	38.5	33.9	27.6	20.3	12.8	5.68	0.77	0.01	366	365
	0.02	1.26	6.65	13.6	20.9	27.9	33.9	38.2	40.4	40.4	38.1	33.6	27.3	20.0	12.6	5.51	0.71	0.01	361	361
	0.02	1.04	6.10	12.9	19.9	26.8	32.7	36.9	39.0	39.0	36.7	32.2	26.1	19.1	11.9	4.94	0.55	0.01	346	345
-30	0.02	0.73	5.15	11.6	18.3	24.7	30.3	34.4	36.4	36.3	34.1	29.7	23.9	17.4	10.5	3.96	0.34	0.01	318	317
-40	0.01	0.40	3.74	9.69	15.9	21.7	26.7	30.4	32.2	32.0	30.0	26.0	20.8	14.8	8.48	2.56	0.16	0.01	276	275
-50	0.01	0.15	2.02	7.00	12.6	17.7	22.0	25.1	26.6	26.4	24.6	21.2	16.7	11.5	5.60	1.07	0.07	0.00	220	219
-60	0.01	0.06	0.60	3.47	8.15	12.5	16.0	18.5	19.6	19.4	17.9	15.1	11.2	6.64	2.13	0.23	0.03	0.00	152	149
-70	0.00	0.03	0.11	0.58	2.18	4.18	6.16	7.39	7.66	7.34	6.47	4.83	2.76	1.05	0.21	0.05	0.01	0.00	51.0	42.9
-80	0.00	0.01	0.02	0.05	0.08	0.13	0.17	0.20	0.19	0.17	0.14	0.10	0.07	0.04	0.02	0.01	0.00	0.00	1.42	0.00
-90	0.00	0.01	0.02	0.05	0.08	0.13	0.17	0.20	0.19	0.17	0.14	0.10	0.07	0.04	0.02	0.01	0.00	0.00	1.42	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.22	9.55	58.7	134	217	298	366	414	437	434	405	352	280	199	116	44.4	5.00	0.12	3770	---
Φ a	0.00	6.33	56.1	131	215	295	364	412	435	432	403	349	278	196	114	41.6	2.06	0.00	---	3730


one-half-peak spread: U:55.4,D:52.6 , L:58.9,R:58.2 NEMA Beam Type: Type 7

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:19 January 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.12V I:0.1684A P:29.347W PF:0.7571 Freq:50.01Hz Lamp Flux:3793.57x1 lm		
NAME: BLP-SFL30WA	TYPE:	WEIGHT:0.898KG
SPEC.:	DIM.: 0.133*0.168*0.040	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.10X0.09	Shielding Angle:

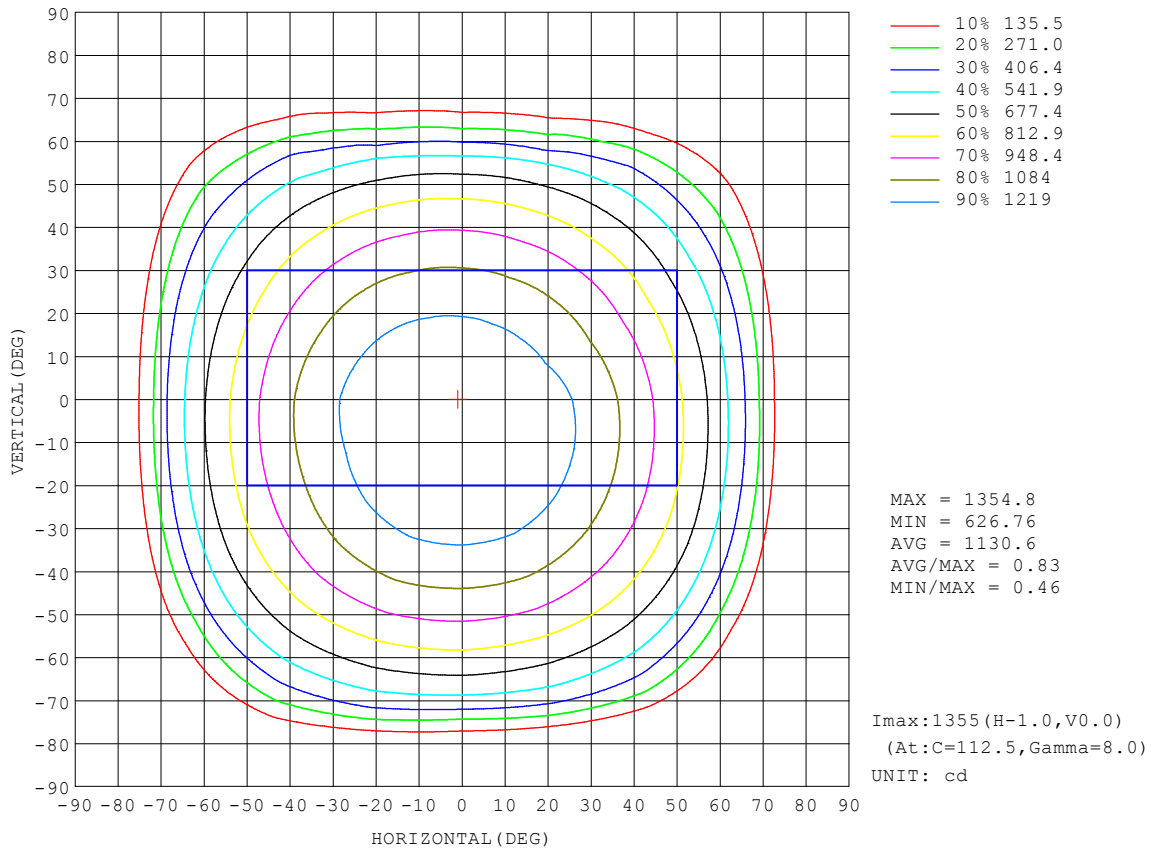


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:19 January 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**


Test:U:230.12V I:0.1684A P:29.347W PF:0.7571 Freq:50.01Hz Lamp Flux:3793.57x1 lm		
NAME: BLP-SFL30WA	TYPE:	WEIGHT:0.898KG
SPEC.:	DIM.: 0.133*0.168*0.040	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.10X0.09	Shielding Angle:

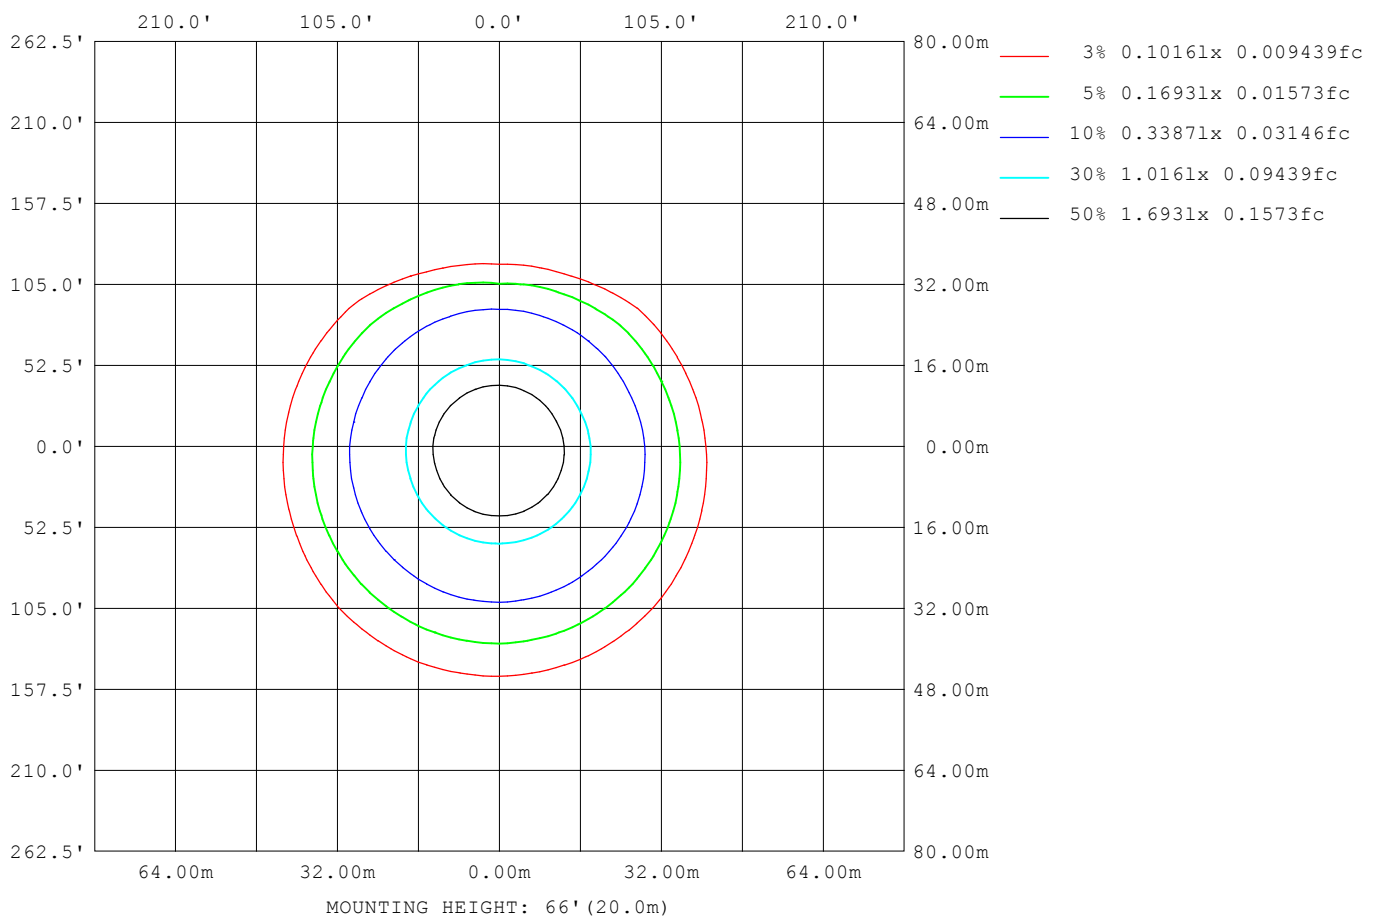

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:19 January 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

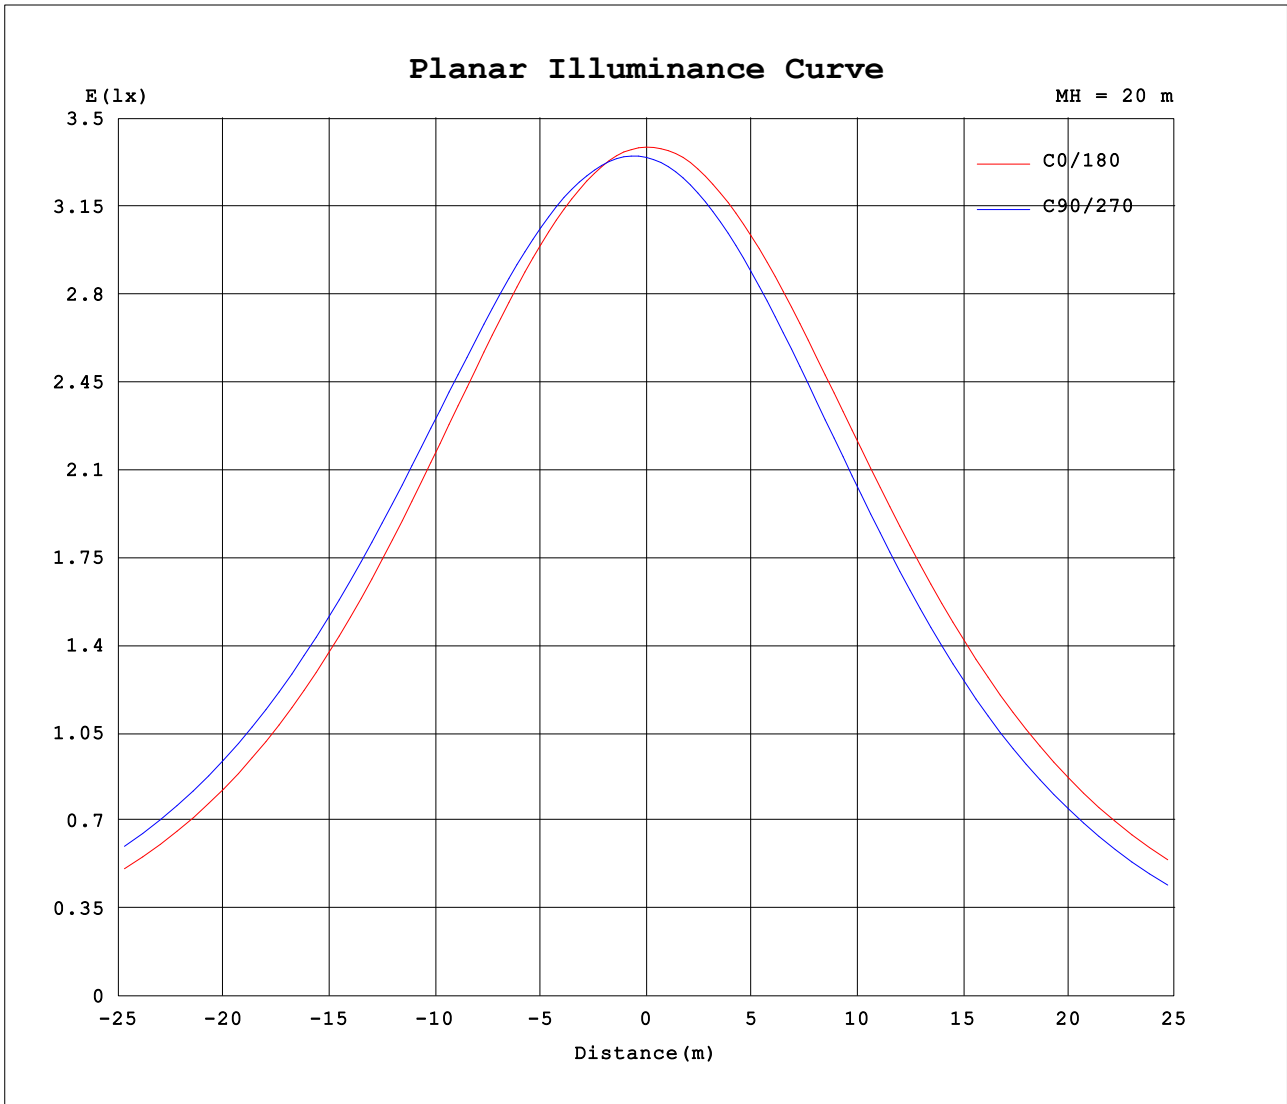


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 19 January 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity: 65.0%  
 Test Distance: 7.680m [K=1.0000]  
 Remarks:

**AAI Figure**

Test:U:230.12V I:0.1684A P:29.347W PF:0.7571 Freq:50.01Hz Lamp Flux:3793.57x1 lm		
NAME: BLP-SFL30WA	TYPE:	WEIGHT:0.898KG
SPEC.:	DIM.: 0.133*0.168*0.040	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.10X0.09	Shielding Angle:

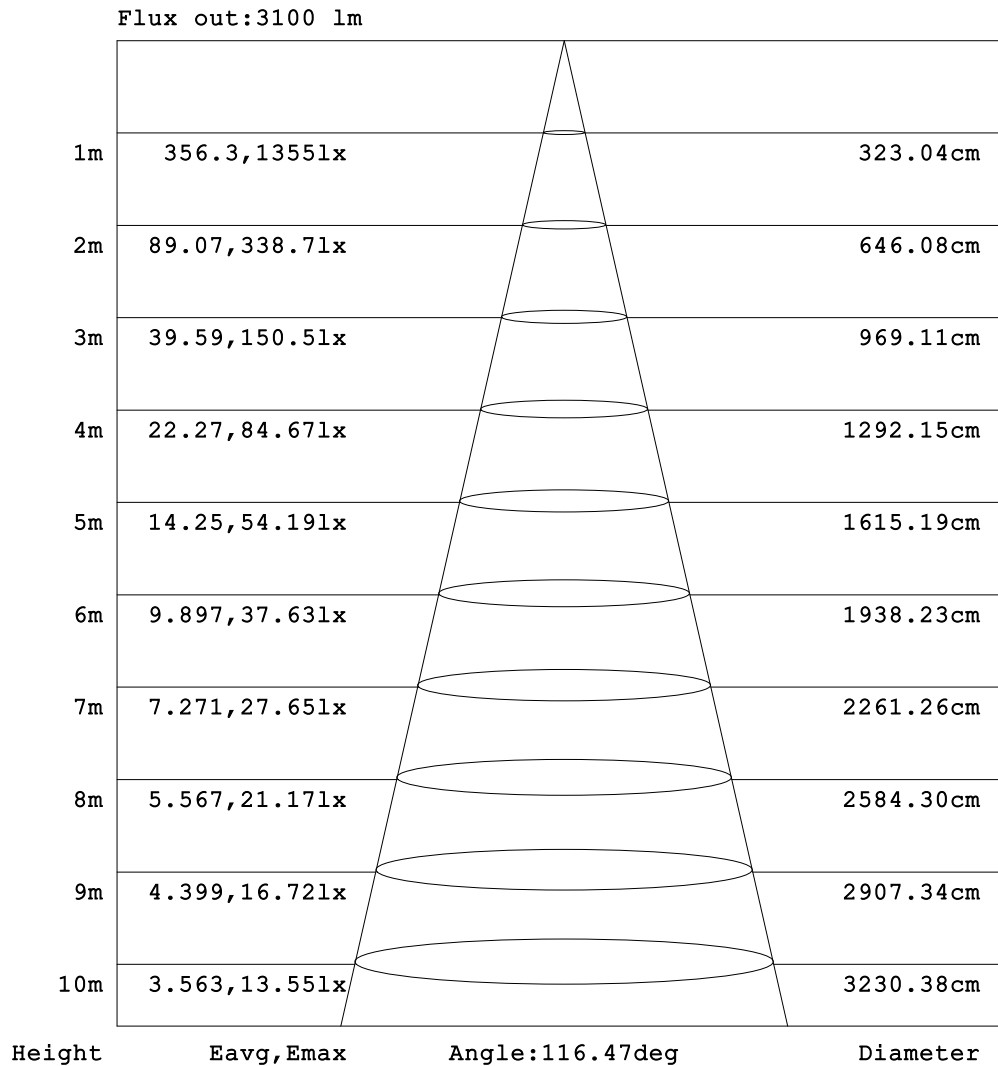

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:19 January 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.12V I:0.1684A P:29.347W PF:0.7571 Freq:50.01Hz Lamp Flux:3793.57x1 lm		
NAME: BLP-SFL30WA	TYPE:	WEIGHT:0.898KG
SPEC.:	DIM.: 0.133*0.168*0.040	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.10X0.09	Shielding Angle:

Table--1

UNIT: cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.59	0.72	1.08	1.55	2.15	2.79	3.41	4.01	4.62	5.23	5.77	6.23	6.59	6.92	7.23	7.47	7.64	7.74	7.94
-170	0.59	0.72	1.06	1.51	2.08	2.70	3.29	3.86	4.44	5.01	5.51	5.92	6.22	6.49	6.73	6.93	7.09	7.21	7.28
-160	0.59	0.71	1.02	1.42	1.94	2.51	3.06	3.58	4.10	4.61	5.07	5.47	5.81	6.08	6.31	6.51	6.66	6.76	6.81
-150	0.59	0.69	0.95	1.30	1.74	2.23	2.72	3.19	3.63	4.06	4.48	4.86	5.21	5.49	5.71	5.87	6.01	6.10	6.14
-140	0.59	0.66	0.88	1.16	1.50	1.89	2.30	2.69	3.07	3.41	3.74	4.05	4.33	4.59	4.80	4.96	5.10	5.19	5.22
-130	0.59	0.62	0.79	1.01	1.25	1.52	1.82	2.12	2.42	2.69	2.93	3.17	3.38	3.56	3.71	3.84	3.96	4.03	4.06
-120	0.59	0.59	0.70	0.85	1.01	1.18	1.35	1.53	1.72	1.90	2.07	2.23	2.37	2.49	2.58	2.69	2.77	2.81	2.83
-110	0.59	0.55	0.62	0.70	0.79	0.88	0.97	1.04	1.12	1.20	1.28	1.34	1.40	1.44	1.48	1.53	1.58	1.60	1.61
-100	0.59	0.53	0.55	0.57	0.60	0.62	0.65	0.66	0.68	0.70	0.71	0.72	0.72	0.72	0.73	0.75	0.76	0.76	0.76
-90	0.59	0.59	0.58	0.58	0.58	0.56	0.53	0.50	0.47	0.45	0.42	0.39	0.36	0.34	0.32	0.32	0.32	0.32	0.32
-80	0.59	0.92	1.38	2.05	2.92	3.96	5.12	6.54	8.31	10.7	15.1	19.1	22.6	24.3	31.3	33.6	31.4	26.0	18.9
-70	0.59	1.36	2.82	5.11	8.36	13.6	33.4	87.7	161	244	307	360	404	443	472	486	494	498	496
-60	0.59	1.93	4.83	9.77	21.5	79.9	185	301	410	497	566	618	662	699	730	750	765	773	776
-50	0.59	2.56	7.29	18.0	88.4	211	361	488	585	669	738	797	846	889	925	951	967	976	978
-40	0.59	3.21	9.88	43.8	174	345	495	614	714	799	872	938	995	1042	1082	1115	1132	1141	1144
-30	0.59	3.82	12.5	84.6	253	442	583	705	806	891	969	1039	1101	1151	1191	1222	1242	1253	1257
-20	0.59	4.30	15.3	118	311	499	641	762	862	952	1032	1102	1164	1214	1256	1286	1307	1319	1323
-10	0.59	4.58	16.9	137	343	524	667	789	891	983	1066	1136	1196	1243	1281	1311	1330	1343	1348
0	0.59	4.66	17.0	139	347	526	669	790	893	986	1069	1141	1202	1253	1293	1323	1342	1354	1355
10	0.59	4.55	16.3	131	327	503	639	757	857	947	1027	1097	1157	1206	1245	1273	1290	1297	1293
20	0.59	4.25	14.4	107	283	457	585	697	792	877	953	1021	1078	1125	1162	1189	1205	1213	1211
30	0.59	3.76	11.9	70.9	220	384	507	610	699	780	851	913	966	1009	1044	1068	1084	1093	1091
40	0.59	3.15	9.33	32.6	142	277	404	498	581	655	718	773	820	861	892	913	930	937	936
50	0.59	2.51	6.86	14.7	62.1	161	259	345	425	492	550	596	636	670	698	719	733	738	736
60	0.59	1.91	4.54	8.74	15.4	47.3	101	154	205	252	297	337	354	368	384	387	400	406	400
70	0.59	1.37	2.69	4.62	7.21	10.3	14.4	22.5	33.6	33.7	49.7	63.4	65.8	55.7	44.2	51.2	54.3	50.8	43.5
80	0.59	0.94	1.39	1.96	2.65	3.42	4.22	5.10	5.99	6.84	7.61	8.25	8.78	9.14	9.45	9.69	9.77	9.70	9.48
90	0.59	0.61	0.63	0.65	0.67	0.69	0.70	0.71	0.72	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.72
100	0.59	0.56	0.60	0.65	0.73	0.81	0.88	0.97	1.05	1.14	1.22	1.29	1.37	1.44	1.50	1.54	1.57	1.60	1.61
110	0.59	0.58	0.68	0.80	0.94	1.09	1.27	1.46	1.66	1.87	2.07	2.26	2.44	2.59	2.73	2.82	2.90	2.96	3.00
120	0.59	0.61	0.77	0.96	1.19	1.45	1.75	2.08	2.42	2.74	3.03	3.28	3.50	3.70	3.87	4.00	4.10	4.18	4.22
130	0.59	0.65	0.85	1.12	1.45	1.83	2.27	2.70	3.11	3.49	3.84	4.17	4.47	4.74	4.98	5.17	5.31	5.41	5.46
140	0.59	0.68	0.93	1.27	1.70	2.20	2.72	3.23	3.69	4.14	4.58	5.01	5.40	5.70	5.96	6.16	6.30	6.38	6.43
150	0.59	0.70	1.00	1.40	1.92	2.50	3.08	3.62	4.15	4.68	5.20	5.66	6.05	6.37	6.62	6.80	6.93	7.01	7.06
160	0.59	0.72	1.05	1.49	2.08	2.70	3.30	3.89	4.48	5.06	5.60	6.07	6.46	6.77	7.02	7.19	7.32	7.42	7.48
170	0.59	0.73	1.08	1.55	2.15	2.80	3.42	4.02	4.64	5.25	5.79	6.25	6.62	6.93	7.20	7.43	7.60	7.66	7.69
180	0.59	0.72	1.08	1.55	2.15	2.79	3.41	4.01	4.62	5.23	5.77	6.23	6.59	6.92	7.23	7.47	7.64	7.74	7.94

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:19 January 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.12V I:0.1684A P:29.347W PF:0.7571 Freq:50.01Hz Lamp Flux:3793.57x1 lm		
NAME: BLP-SFL30WA	TYPE:	WEIGHT:0.898KG
SPEC.:	DIM.: 0.133*0.168*0.040	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.10X0.09	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.73	7.55	7.41	7.23	6.99	6.73	6.43	6.05	5.60	5.07	4.48	3.87	3.26	2.62	1.97	1.42	0.99	0.65	
-170	7.34	7.28	7.17	7.00	6.77	6.50	6.22	5.84	5.41	4.89	4.32	3.74	3.15	2.54	1.92	1.39	0.98	0.65	
-160	6.85	6.81	6.69	6.53	6.34	6.12	5.81	5.46	5.04	4.54	4.02	3.49	2.95	2.38	1.82	1.34	0.96	0.65	
-150	6.16	6.12	6.03	5.91	5.71	5.49	5.21	4.88	4.49	4.05	3.61	3.15	2.66	2.15	1.67	1.26	0.93	0.65	
-140	5.24	5.20	5.12	5.01	4.84	4.64	4.41	4.13	3.81	3.46	3.10	2.71	2.29	1.87	1.49	1.17	0.89	0.65	
-130	4.08	4.07	4.01	3.93	3.82	3.68	3.50	3.30	3.06	2.78	2.50	2.20	1.88	1.58	1.30	1.06	0.84	0.65	
-120	2.86	2.86	2.83	2.77	2.71	2.61	2.50	2.37	2.22	2.05	1.86	1.67	1.47	1.29	1.12	0.95	0.80	0.65	
-110	1.64	1.65	1.65	1.63	1.61	1.59	1.56	1.51	1.45	1.37	1.29	1.21	1.12	1.03	0.93	0.83	0.75	0.65	
-100	0.79	0.81	0.82	0.83	0.85	0.86	0.87	0.87	0.87	0.86	0.85	0.84	0.82	0.79	0.76	0.73	0.69	0.65	
-90	0.34	0.35	0.36	0.37	0.39	0.41	0.43	0.45	0.47	0.50	0.52	0.55	0.58	0.60	0.61	0.62	0.64	0.65	
-80	18.6	17.9	16.9	15.3	13.1	10.9	8.70	6.94	5.39	4.24	3.19	2.29	1.62	1.09	0.72	0.57	0.59	0.65	
-70	490	478	460	437	399	352	294	229	156	81.0	31.1	12.1	7.26	4.38	2.34	1.08	0.58	0.65	
-60	767	753	733	707	671	628	577	517	437	336	218	100	23.8	10.6	5.48	2.24	0.72	0.65	
-50	971	957	935	904	863	816	760	695	618	527	411	266	124	28.9	9.77	3.90	0.97	0.65	
-40	1138	1124	1102	1065	1019	966	903	834	755	662	549	414	246	90.8	15.7	5.77	1.32	0.65	
-30	1250	1238	1213	1177	1132	1076	1010	936	853	760	647	510	343	158	27.9	7.59	1.69	0.65	
-20	1318	1305	1280	1246	1201	1144	1077	1001	915	817	705	571	407	210	46.6	9.12	2.00	0.65	
-10	1348	1334	1311	1277	1232	1175	1107	1029	941	843	731	598	437	236	61.2	10.1	2.20	0.65	
0	1349	1332	1307	1271	1226	1169	1101	1024	936	838	727	595	437	237	62.9	10.4	2.26	0.65	
10	1283	1265	1240	1205	1162	1110	1048	975	891	797	690	564	410	221	56.7	9.94	2.19	0.65	
20	1203	1185	1161	1126	1082	1029	965	893	815	726	625	506	354	184	40.1	8.87	1.99	0.65	
30	1084	1066	1042	1010	967	918	860	792	714	627	533	418	274	129	22.7	7.30	1.68	0.65	
40	929	913	888	860	821	774	719	658	587	506	411	299	183	65.5	13.8	5.50	1.31	0.65	
50	730	715	692	663	628	585	536	483	419	328	245	170	82.0	20.1	8.87	3.72	0.96	0.65	
60	394	380	363	329	311	292	257	214	171	126	82.9	42.6	16.1	9.12	4.99	2.16	0.72	0.65	
70	43.4	42.4	40.3	37.2	40.5	38.6	30.6	24.7	20.5	16.4	12.1	8.75	6.03	3.87	2.20	1.06	0.60	0.65	
80	9.23	8.86	8.35	7.73	7.06	6.42	5.68	4.91	4.10	3.40	2.70	2.05	1.49	1.05	0.74	0.60	0.60	0.65	
90	0.74	0.75	0.76	0.77	0.77	0.77	0.76	0.76	0.75	0.73	0.70	0.68	0.66	0.65	0.65	0.65	0.65	0.65	
100	1.62	1.62	1.61	1.60	1.56	1.50	1.43	1.36	1.30	1.21	1.12	1.03	0.94	0.87	0.81	0.76	0.70	0.65	
110	2.99	2.96	2.91	2.84	2.73	2.61	2.46	2.30	2.11	1.90	1.69	1.48	1.29	1.13	0.99	0.87	0.76	0.65	
120	4.20	4.16	4.08	3.98	3.82	3.63	3.43	3.21	2.95	2.66	2.35	2.02	1.70	1.43	1.20	0.99	0.81	0.65	
130	5.44	5.37	5.27	5.11	4.88	4.62	4.33	3.99	3.65	3.31	2.94	2.54	2.13	1.74	1.39	1.11	0.86	0.65	
140	6.41	6.34	6.22	6.04	5.80	5.52	5.17	4.77	4.32	3.87	3.43	2.98	2.53	2.04	1.59	1.21	0.90	0.65	
150	7.03	6.97	6.86	6.68	6.44	6.15	5.79	5.36	4.87	4.34	3.85	3.36	2.84	2.29	1.75	1.30	0.94	0.65	
160	7.45	7.36	7.21	7.04	6.81	6.53	6.17	5.75	5.28	4.75	4.18	3.63	3.07	2.48	1.88	1.37	0.97	0.65	
170	7.66	7.57	7.42	7.20	6.96	6.70	6.39	6.00	5.54	5.00	4.40	3.81	3.21	2.59	1.95	1.41	0.98	0.65	
180	7.73	7.55	7.41	7.23	6.99	6.73	6.43	6.05	5.60	5.07	4.48	3.87	3.26	2.62	1.97	1.42	0.99	0.65	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:19 January 2018

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks: