

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		365.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal

Beam Spread	At 10% of I <sub>max</sub>	142.7V x 147.3H
	At 50% of I <sub>max</sub>	113.4V x 115.4H
	At 90% of I <sub>max</sub>	52.4V x 53.4H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of I <sub>max</sub>	982.2 lumens per klm.
	To 50% of I <sub>max</sub>	816.2 lumens per klm.
	To 90% of I <sub>max</sub>	234.1 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 28 December 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity: 65.0%  
 Test Distance: 7.680m [K=1.0000]  
 Remarks:

**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.10V I:0.2755A P:47.283W PF:0.7459 Freq:50.01Hz Lamp Flux:6013.4x1 lm		
NAME: BLP-SFL50WA	TYPE:	WEIGHT:1.24KG
SPEC.:	DIM.: 0.158*0.203	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

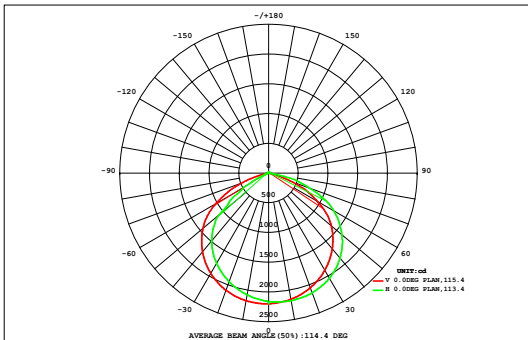

DATA OF LAMP		Eff:127.18lm/W	
MODEL		Imax (cd)	2197
NOMINAL POWER (W)	50	AVAILABILITY (%)	98.2
RATED VOLTAGE (V)	230	Avai. FLUX (lm)	5904
NOMINAL FLUX (lm)	6013.4	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	6013
TEST VOLTAGE (V)	230	θ @50% (H,V)	115,113DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.10	0.11	0.11	0.11	0.09	0.08	0.06	0.04	0.02	0.01			0.00
90	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.10	0.11	0.11	0.11	0.09	0.08	0.06	0.04	0.02	0.01	0.00	0.99	0.00
80	0.00	0.02	0.07	0.17	0.31	0.48	0.63	0.75	0.82	0.83	0.78	0.67	0.54	0.37	0.21	0.09	0.03	0.00	6.77	0.00
70	0.00	0.05	0.22	0.93	2.16	3.75	4.87	5.77	6.22	6.20	5.72	4.85	3.78	2.29	1.11	0.30	0.07	0.01	48.3	25.3
60	0.01	0.10	1.00	4.42	8.95	14.0	18.2	21.0	22.6	22.5	20.8	18.1	13.9	9.04	4.74	1.23	0.14	0.01	181	176
50	0.01	0.21	2.92	9.36	16.9	25.4	31.7	36.9	39.6	39.6	36.9	31.8	25.5	17.1	9.65	3.32	0.32	0.02	327	325
40	0.01	0.48	5.09	13.4	23.2	32.4	40.2	46.0	49.1	49.2	46.2	40.5	32.8	23.6	13.9	5.57	0.67	0.02	422	421
30	0.02	0.83	6.86	16.5	27.4	37.5	46.1	52.5	55.8	55.9	52.6	46.5	37.9	27.8	17.3	7.40	1.09	0.03	490	489
	0.02	1.14	8.11	18.9	30.4	41.1	50.5	57.4	60.9	60.8	57.4	50.8	41.7	31.1	19.8	8.76	1.46	0.03	540	539
	0.02	1.34	8.85	20.3	32.3	43.6	53.5	60.7	64.4	64.0	60.9	54.3	44.8	33.5	21.4	9.62	1.71	0.03	575	574
	0.02	1.39	9.09	20.8	33.0	44.4	54.2	61.3	65.1	66.3	63.2	56.2	46.3	34.5	22.1	9.95	1.78	0.03	590	589
	0.02	1.30	8.80	20.3	32.4	43.5	53.3	60.7	64.9	65.7	62.6	55.7	45.9	34.2	21.8	9.70	1.68	0.03	583	582
	0.02	1.05	7.92	19.0	30.8	41.8	51.4	58.8	62.9	63.6	60.4	53.6	44.1	32.8	20.6	8.85	1.41	0.03	559	558
-30	0.01	0.71	6.42	16.7	28.1	38.6	47.9	54.9	58.8	59.4	56.3	49.8	40.7	30.0	18.3	7.36	1.01	0.02	515	514
-40	0.01	0.36	4.38	13.4	24.0	33.9	42.3	48.8	52.4	52.8	49.9	43.9	35.5	25.6	14.8	5.30	0.58	0.02	448	446
-50	0.01	0.15	2.17	9.05	18.5	27.3	34.7	40.2	43.3	43.6	41.0	35.8	28.6	19.7	10.2	2.92	0.25	0.01	357	355
-60	0.00	0.07	0.59	3.91	10.6	17.7	23.8	28.2	30.5	30.7	28.7	24.6	18.7	11.7	4.86	0.94	0.11	0.01	236	231
-70	0.00	0.03	0.13	0.66	2.53	5.87	9.73	12.3	13.4	13.6	12.7	10.4	6.68	3.26	0.99	0.20	0.05	0.01	92.4	79.3
-80	0.00	0.01	0.02	0.05	0.11	0.22	0.39	0.54	0.61	0.64	0.62	0.49	0.31	0.18	0.09	0.04	0.01	0.00	4.33	0.00
-90	0.00	0.01	0.02	0.05	0.11	0.22	0.39	0.54	0.61	0.64	0.62	0.49	0.31	0.18	0.09	0.04	0.01	0.00	4.33	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.20	9.21	72.6	188	321	452	564	647	692	695	657	578	468	337	202	81.6	12.4	0.31	5976	---
Φ a	0.00	4.06	67.9	184	317	447	559	642	687	691	653	574	464	333	197	76.8	6.65	0.00	---	5904

one-half-peak spread: U:54.9,D:49.8 , L:60.1,R:55.7 NEMA Beam Type: Type 7

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Temperature:25.3DEG	Humidity:65.0%
Operators:DAMIN	Test Distance:7.680m [K=1.0000]
Test Date:28 December 2017	Remarks:

ISOCANDELA DIAGRAM

Test:U:230.10V I:0.2755A P:47.283W PF:0.7459 Freq:50.01Hz Lamp Flux:6013.4x1 lm		
NAME: BLP-SFL50WA	TYPE:	WEIGHT:1.24KG
SPEC.:	DIM.: 0.158*0.203	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

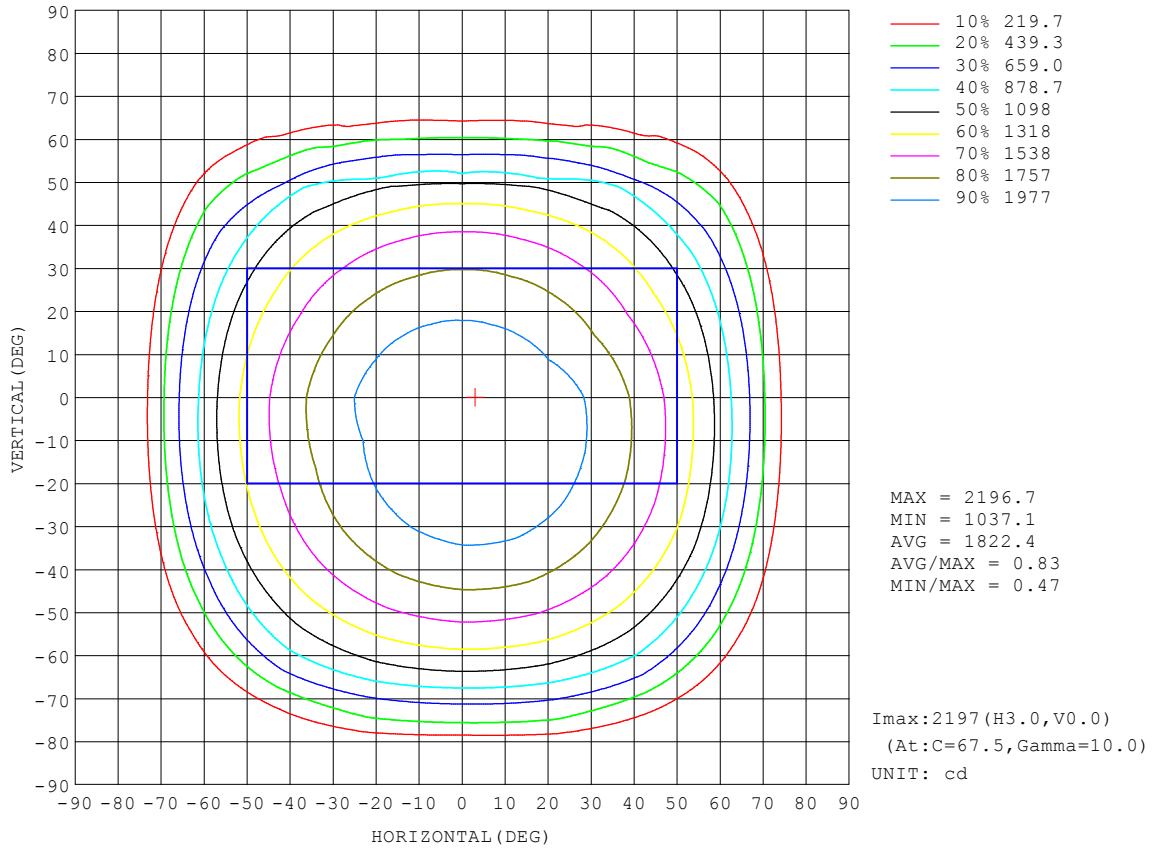


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:28 December 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**


Test:U:230.10V I:0.2755A P:47.283W PF:0.7459 Freq:50.01Hz Lamp Flux:6013.4x1 lm		
NAME: BLP-SFL50WA	TYPE:	WEIGHT:1.24KG
SPEC.:	DIM.: 0.158*0.203	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

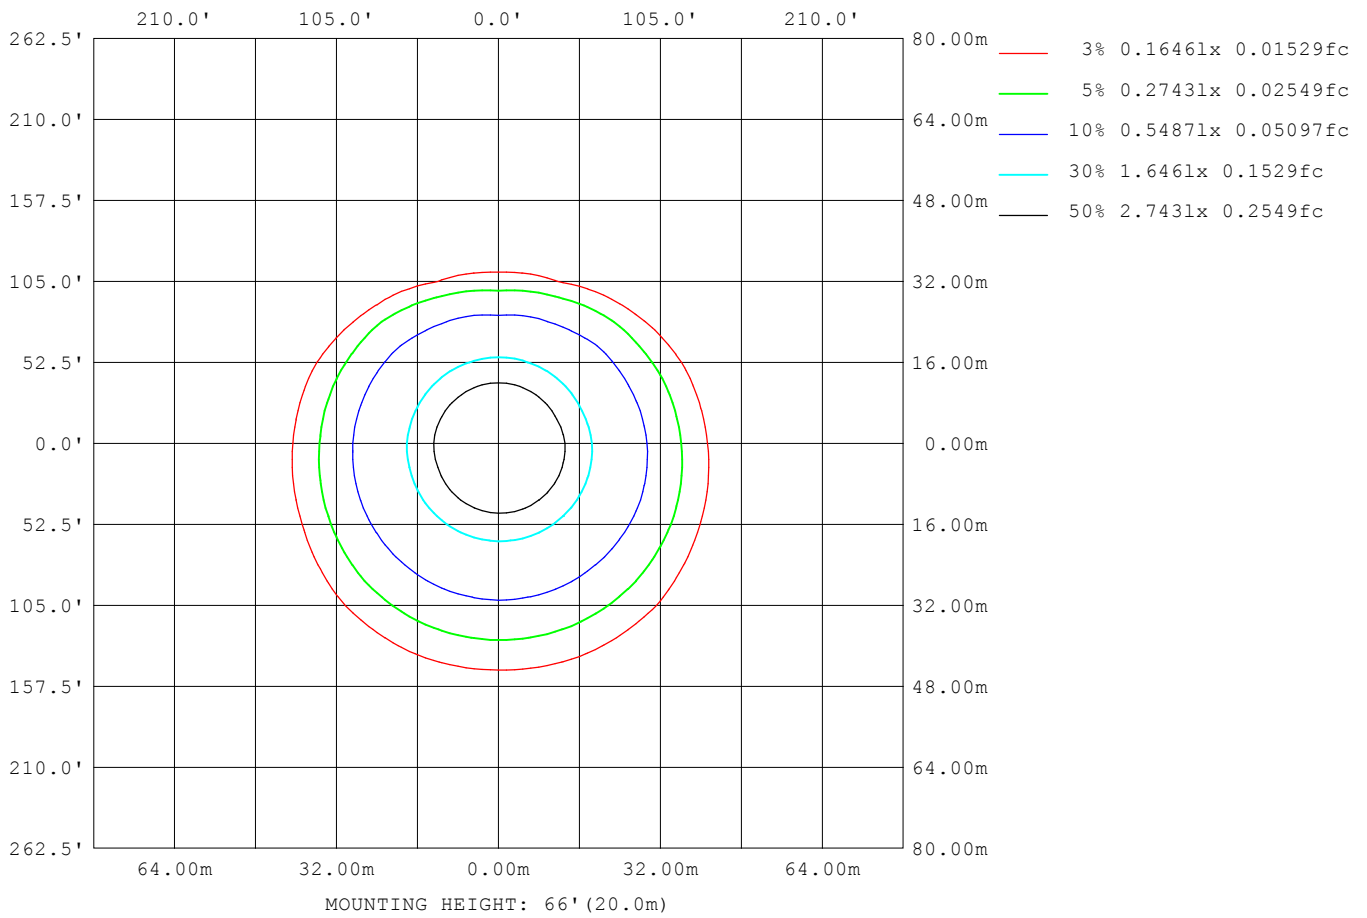

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:28 December 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

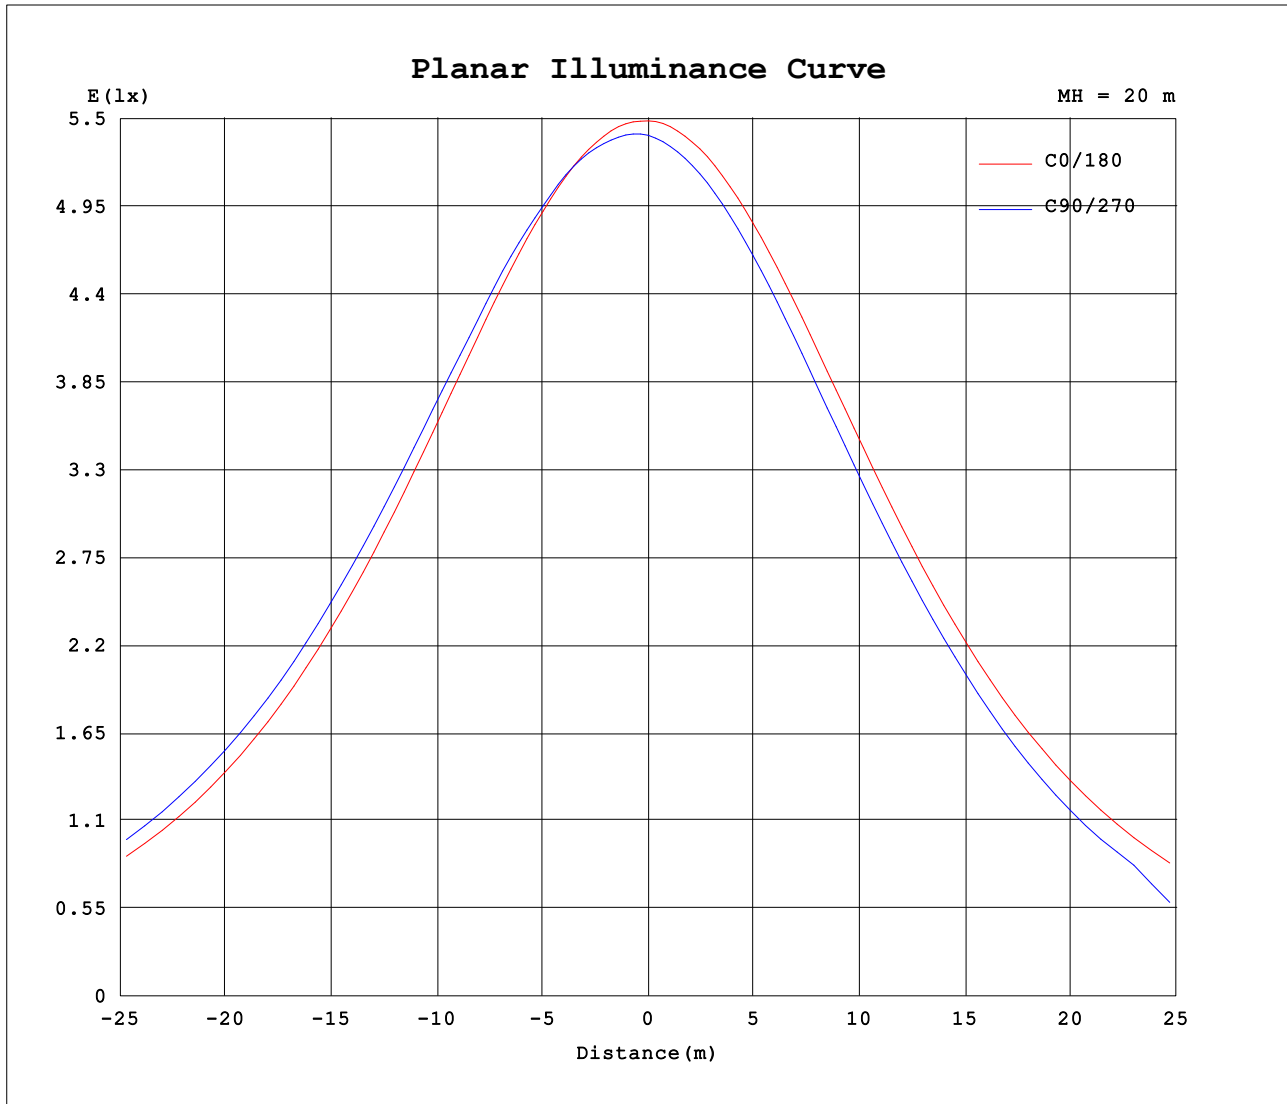


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 28 December 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity: 65.0%  
 Test Distance: 7.680m [K=1.0000]  
 Remarks:

**AAI Figure**

Test:U:230.10V I:0.2755A P:47.283W PF:0.7459 Freq:50.01Hz Lamp Flux:6013.4x1 lm		
NAME: BLP-SFL50WA	TYPE:	WEIGHT:1.24KG
SPEC.:	DIM.: 0.158*0.203	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

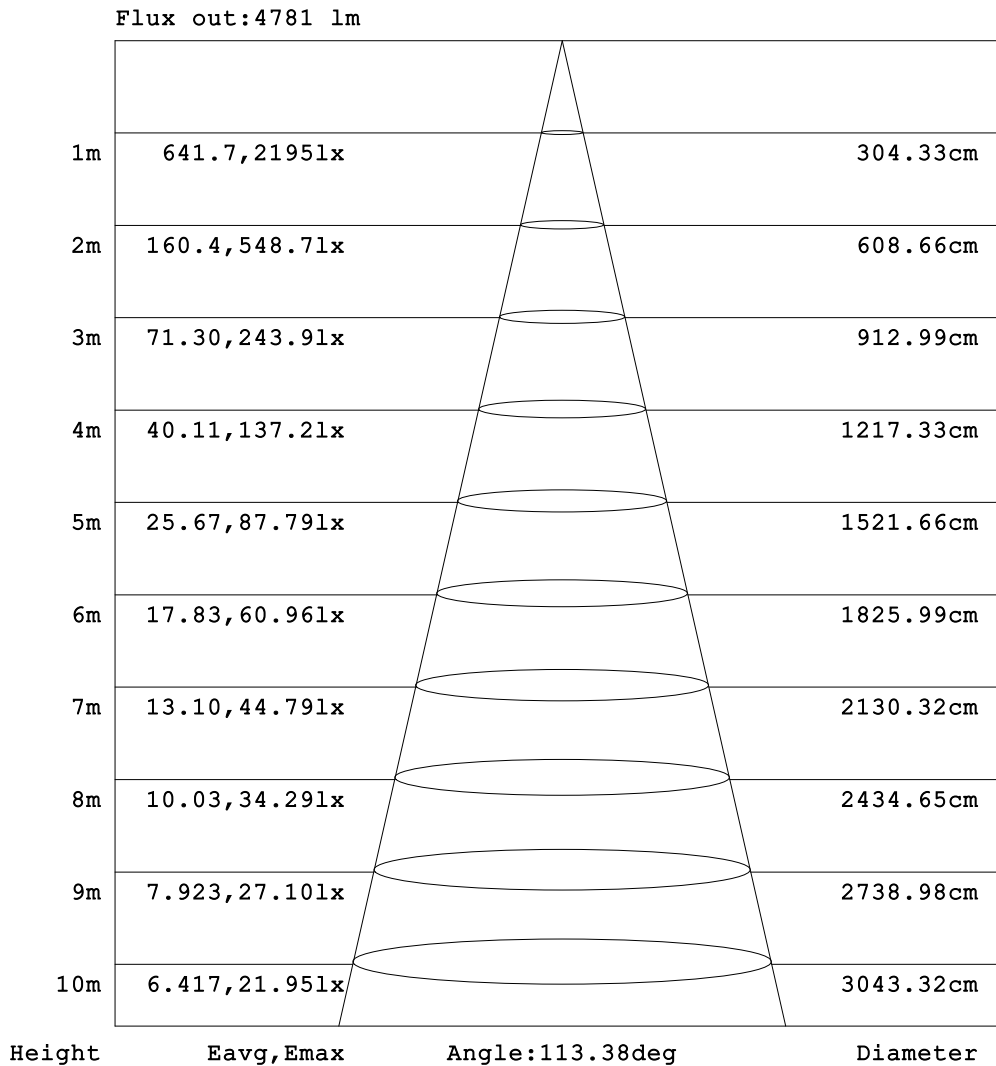

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:28 December 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.10V I:0.2755A P:47.283W PF:0.7459 Freq:50.01Hz Lamp Flux:6013.4x1 lm		
NAME: BLP-SFL50WA	TYPE:	WEIGHT:1.24KG
SPEC.:	DIM.: 0.158*0.203	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

Table--1

UNIT: cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.93	1.34	1.97	2.84	3.83	4.86	5.86	6.87	7.86	8.82	9.66	10.4	11.0	11.5	11.9	12.2	12.4	12.6	12.7
-170	0.93	1.33	1.93	2.75	3.69	4.66	5.60	6.53	7.45	8.31	9.09	9.71	10.1	10.5	10.8	11.1	11.3	11.5	11.6
-160	0.93	1.30	1.84	2.58	3.43	4.31	5.16	5.98	6.79	7.54	8.22	8.85	9.37	9.76	10.1	10.4	10.6	10.7	10.8
-150	0.93	1.26	1.73	2.34	3.07	3.83	4.56	5.26	5.93	6.60	7.21	7.77	8.26	8.69	9.02	9.24	9.42	9.55	9.58
-140	0.93	1.21	1.58	2.07	2.64	3.26	3.86	4.43	4.97	5.51	5.99	6.41	6.81	7.16	7.44	7.62	7.82	7.93	7.94
-130	0.93	1.15	1.43	1.78	2.18	2.63	3.07	3.50	3.90	4.29	4.64	4.97	5.26	5.50	5.69	5.84	5.97	6.03	6.03
-120	0.93	1.08	1.28	1.50	1.75	2.02	2.28	2.54	2.79	3.01	3.23	3.42	3.59	3.72	3.81	3.94	4.02	4.05	4.03
-110	0.93	1.02	1.13	1.25	1.37	1.50	1.60	1.71	1.80	1.89	1.97	2.03	2.08	2.10	2.12	2.17	2.20	2.21	2.18
-100	0.93	0.96	0.99	1.02	1.06	1.08	1.09	1.10	1.09	1.09	1.09	1.08	1.05	1.02	1.00	1.01	1.00	0.99	0.97
-90	0.93	0.90	0.87	0.85	0.82	0.79	0.75	0.71	0.68	0.64	0.61	0.59	0.56	0.53	0.53	0.54	0.55	0.56	0.58
-80	0.93	0.85	0.99	1.49	2.39	3.77	5.73	8.31	11.7	15.8	21.3	30.7	49.7	71.5	93.9	104	110	111	106
-70	0.93	0.97	2.12	4.69	8.99	15.8	38.2	90.0	173	269	374	467	544	608	657	689	711	724	728
-60	0.93	1.30	4.17	10.4	21.9	69.5	201	361	535	698	834	932	1018	1092	1154	1196	1228	1250	1262
-50	0.93	1.78	7.03	18.7	77.3	236	437	655	841	998	1132	1241	1333	1411	1477	1529	1567	1593	1608
-40	0.93	2.36	10.1	35.3	182	408	654	865	1062	1224	1354	1465	1564	1649	1720	1780	1821	1850	1867
-30	0.93	2.93	13.1	67.6	281	553	805	1030	1227	1377	1507	1624	1725	1814	1887	1947	1994	2023	2042
-20	0.93	3.39	15.6	105	355	651	900	1136	1324	1473	1602	1718	1820	1908	1985	2044	2091	2124	2143
-10	0.93	3.63	17.1	126	393	699	946	1186	1374	1525	1658	1771	1869	1951	2019	2077	2123	2156	2179
0	0.93	3.68	17.2	127	395	701	942	1187	1376	1530	1665	1784	1888	1978	2052	2111	2154	2181	2195
10	0.93	3.56	16.3	113	369	665	894	1130	1316	1464	1595	1710	1810	1895	1965	2021	2058	2078	2079
20	0.93	3.26	14.3	81.7	309	586	802	1018	1207	1349	1473	1585	1682	1764	1829	1882	1916	1937	1943
30	0.93	2.78	11.6	44.6	214	459	679	855	1037	1188	1308	1414	1503	1577	1642	1689	1722	1745	1751
40	0.93	2.21	8.74	23.9	114	301	507	660	787	958	1080	1179	1261	1330	1387	1430	1466	1486	1490
50	0.93	1.67	5.89	14.0	35.8	126	271	396	498	601	687	846	888	903	954	1038	1058	1069	1063
60	0.93	1.24	3.42	7.79	14.1	26.0	65.5	112	176	231	283	309	374	372	434	438	451	471	479
70	0.93	0.96	1.78	3.42	5.91	9.10	12.9	17.8	23.9	28.0	33.5	37.9	43.8	48.9	47.1	50.8	53.0	53.7	52.9
80	0.93	0.90	0.98	1.25	1.69	2.26	2.93	3.74	4.56	5.33	6.23	7.04	7.78	8.35	8.94	9.50	9.90	10.1	10.2
90	0.93	0.96	0.99	1.02	1.05	1.08	1.11	1.15	1.19	1.22	1.24	1.25	1.27	1.29	1.29	1.28	1.28	1.27	1.26
100	0.93	1.02	1.13	1.24	1.36	1.50	1.64	1.79	1.95	2.10	2.23	2.36	2.48	2.60	2.68	2.73	2.76	2.78	2.78
110	0.93	1.08	1.27	1.49	1.75	2.05	2.36	2.69	3.04	3.38	3.68	3.96	4.22	4.44	4.63	4.75	4.83	4.88	4.90
120	0.93	1.15	1.43	1.78	2.20	2.68	3.20	3.73	4.26	4.76	5.22	5.60	5.94	6.25	6.51	6.68	6.81	6.88	6.91
130	0.93	1.21	1.58	2.08	2.67	3.34	4.05	4.74	5.39	6.00	6.58	7.10	7.55	7.97	8.32	8.57	8.72	8.80	8.82
140	0.93	1.26	1.73	2.35	3.11	3.94	4.79	5.58	6.34	7.08	7.78	8.46	9.01	9.48	9.87	10.2	10.3	10.4	10.4
150	0.93	1.30	1.85	2.59	3.47	4.41	5.34	6.24	7.13	7.96	8.76	9.48	10.1	10.6	10.9	11.2	11.3	11.4	11.4
160	0.93	1.33	1.93	2.75	3.72	4.73	5.71	6.68	7.64	8.57	9.42	10.1	10.7	11.2	11.6	11.8	12.0	12.1	12.1
170	0.93	1.34	1.97	2.84	3.84	4.88	5.88	6.89	7.89	8.85	9.70	10.4	11.0	11.5	11.9	12.2	12.4	12.5	12.4
180	0.93	1.34	1.97	2.84	3.83	4.86	5.86	6.87	7.86	8.82	9.66	10.4	11.0	11.5	11.9	12.2	12.4	12.6	12.7

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:28 December 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.10V I:0.2755A P:47.283W PF:0.7459 Freq:50.01Hz Lamp Flux:6013.4x1 lm		
NAME: BLP-SFL50WA	TYPE:	WEIGHT:1.24KG
SPEC.:	DIM.: 0.158*0.203	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	12.4	12.0	11.8	11.5	11.1	10.6	10.0	9.36	8.58	7.72	6.76	5.77	4.80	3.77	2.81	2.01	1.38	0.96	
-170	11.7	11.6	11.3	11.0	10.6	10.2	9.66	9.00	8.24	7.39	6.48	5.55	4.61	3.64	2.72	1.97	1.37	0.96	
-160	10.8	10.8	10.5	10.2	9.87	9.48	8.95	8.33	7.60	6.82	5.99	5.15	4.28	3.38	2.56	1.88	1.34	0.96	
-150	9.59	9.50	9.33	9.09	8.76	8.36	7.88	7.32	6.69	6.02	5.31	4.58	3.80	3.03	2.35	1.76	1.29	0.96	
-140	7.96	7.89	7.73	7.54	7.28	6.94	6.55	6.11	5.60	5.05	4.48	3.86	3.23	2.62	2.08	1.62	1.24	0.96	
-130	6.06	6.02	5.91	5.76	5.59	5.36	5.07	4.73	4.35	3.94	3.51	3.07	2.62	2.19	1.81	1.46	1.17	0.96	
-120	4.06	4.04	3.97	3.86	3.77	3.64	3.47	3.27	3.05	2.82	2.56	2.29	2.03	1.77	1.52	1.30	1.11	0.96	
-110	2.22	2.23	2.21	2.17	2.16	2.13	2.09	2.02	1.95	1.85	1.74	1.63	1.51	1.39	1.27	1.15	1.04	0.96	
-100	1.00	1.02	1.04	1.04	1.06	1.10	1.13	1.14	1.15	1.14	1.13	1.12	1.10	1.07	1.04	1.01	0.97	0.96	
-90	0.61	0.64	0.68	0.71	0.74	0.76	0.78	0.80	0.82	0.83	0.85	0.86	0.87	0.89	0.91	0.92	0.94	0.96	
-80	114	116	113	105	86.1	65.1	45.3	34.0	23.6	17.7	13.3	9.62	6.90	4.72	3.07	1.90	1.20	0.96	
-70	730	723	706	680	638	578	508	424	321	221	131	59.5	24.9	14.2	8.17	4.12	1.78	0.96	
-60	1257	1242	1216	1179	1124	1057	978	882	751	598	426	263	121	36.7	16.1	7.31	2.58	0.96	
-50	1605	1591	1563	1518	1458	1386	1303	1197	1066	907	723	514	303	127	30.0	11.3	3.49	0.96	
-40	1866	1853	1828	1776	1714	1639	1540	1431	1306	1151	952	726	483	244	64.1	15.4	4.44	0.96	
-30	2042	2031	1998	1951	1890	1807	1710	1598	1469	1323	1127	882	627	346	116	19.8	5.33	0.96	
-20	2147	2135	2106	2060	1993	1913	1816	1703	1566	1412	1224	981	720	424	156	23.9	6.00	0.96	
-10	2190	2183	2152	2108	2042	1957	1858	1742	1606	1452	1268	1027	761	463	180	26.1	6.37	0.96	
0	2195	2179	2147	2098	2030	1947	1847	1730	1595	1442	1260	1019	756	462	180	25.8	6.43	0.96	
10	2068	2048	2015	1966	1906	1834	1745	1637	1510	1365	1191	959	712	431	161	24.3	6.21	0.96	
20	1937	1916	1884	1835	1774	1696	1603	1493	1376	1241	1071	849	631	363	123	21.2	5.71	0.96	
30	1746	1726	1695	1650	1590	1517	1429	1325	1206	1068	896	702	507	254	79.4	17.0	4.95	0.96	
40	1488	1469	1435	1393	1339	1271	1189	1092	981	811	673	535	341	149	37.1	12.8	4.04	0.96	
50	1070	1057	1020	931	906	894	840	686	615	501	417	299	152	57.4	19.8	9.08	3.12	0.96	
60	471	451	437	420	371	370	307	281	236	190	127	81.2	35.7	19.3	11.2	5.68	2.29	0.96	
70	54.1	53.9	52.2	49.0	51.3	46.7	41.1	37.4	32.9	30.0	22.1	16.6	12.1	8.46	5.42	3.14	1.60	0.96	
80	10.3	10.3	10.1	9.69	9.29	8.91	8.31	7.59	6.73	5.98	5.12	4.20	3.38	2.65	2.04	1.52	1.13	0.96	
90	1.26	1.25	1.24	1.24	1.22	1.20	1.17	1.15	1.12	1.08	1.04	1.00	0.96	0.94	0.95	0.95	0.95	0.96	
100	2.76	2.72	2.66	2.59	2.49	2.36	2.22	2.09	1.95	1.79	1.63	1.47	1.34	1.23	1.15	1.07	1.00	0.96	
110	4.85	4.76	4.63	4.48	4.28	4.03	3.76	3.48	3.16	2.81	2.46	2.13	1.83	1.60	1.40	1.23	1.07	0.96	
120	6.82	6.69	6.51	6.29	5.99	5.65	5.28	4.88	4.43	3.94	3.43	2.91	2.43	2.02	1.68	1.38	1.14	0.96	
130	8.73	8.58	8.35	8.04	7.63	7.18	6.68	6.13	5.56	4.97	4.34	3.68	3.05	2.48	1.97	1.55	1.20	0.96	
140	10.3	10.1	9.88	9.53	9.09	8.57	7.96	7.27	6.55	5.82	5.11	4.39	3.64	2.91	2.25	1.70	1.26	0.96	
150	11.3	11.1	10.9	10.5	10.1	9.57	8.92	8.17	7.35	6.51	5.74	4.98	4.14	3.28	2.49	1.83	1.31	0.96	
160	12.0	11.8	11.5	11.1	10.6	10.1	9.50	8.76	7.98	7.15	6.28	5.41	4.51	3.56	2.67	1.93	1.35	0.96	
170	12.3	12.1	11.7	11.3	10.9	10.4	9.87	9.22	8.43	7.57	6.63	5.68	4.73	3.73	2.78	1.99	1.37	0.96	
180	12.4	12.0	11.8	11.5	11.1	10.6	10.0	9.36	8.58	7.72	6.76	5.77	4.80	3.77	2.81	2.01	1.38	0.96	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:28 December 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks: