

# AC-PIR FLOODLIGHT



## MAIN FEATURES


- System Efficiency up to 110lm/W
- ADC12 body + 6063 bracket
- Build-in PIR sensor
- Parameter adjustable by IR remote controller
- IP65, suitable for outdoor lighting
- 2 years warranty



CE RoHS



## DIMENSIONS

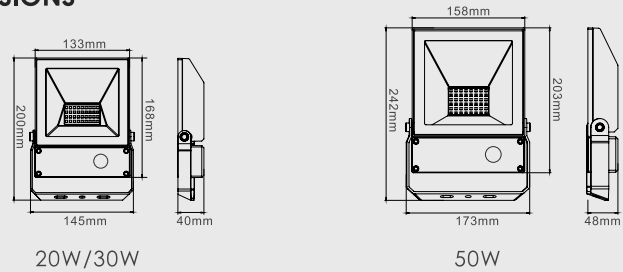

Model No.	BLP-FL20WAC-PIR	BLP-FL30WAC-PIR	BLP-FL50WAC-PIR
Light Source	SMD3030	SMD3030	SMD3030
Input Voltage	220-240VAC 50Hz	220-240VAC 50Hz	220-240VAC 50Hz
System Power (W)	20	30	50
Luminous Flux (lm)	2000-2200	3000-3300	5000-5500
Power Factor	>0.98	>0.98	>0.98
CCT (K)	3000/4000/5700	3000/4000/5700	3000/4000/5700
CRI	>70	>70	>70
Beam Angle	120°	120°	120°
Detection distance	5m	5m	5m
Delay time	5s-30min	5s-30min	5s-30min
Light sensor	5/15/30/50/disable Lux	5/15/30/50/disable Lux	5/15/30/50/disable Lux