

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		370.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal

Beam Spread	At 10% of Imax	142.8V x 147.1H
	At 50% of Imax	110.7V x 112.5H
	At 90% of Imax	51.6V x 52.2H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	981.1 lumens per klm.
	To 50% of Imax	798.3 lumens per klm.
	To 90% of Imax	230.0 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 29 November 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity: 65.0%  
 Test Distance: 7.680m [K=1.0000]  
 Remarks:

**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.13V I:0.2278A P:52.133W PF:0.9945 Freq:50.01Hz Lamp Flux:5598.48x1 lm		
NAME: BLP-FL50WAC	TYPE:	WEIGHT:1.24Kg
SPEC.:	DIM.: 0.158X0.203X0.048	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

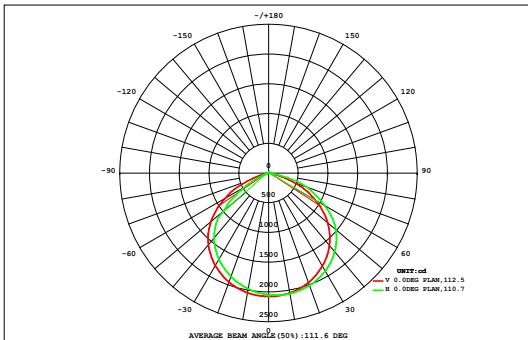

DATA OF LAMP		Eff:107.39lm/W	
MODEL		Imax (cd)	2075
NOMINAL POWER (W)	50	AVAILABILITY (%)	98.1
RATED VOLTAGE (V)	230	Avai. FLUX (lm)	5489
NOMINAL FLUX (lm)	5598.48	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	5598
TEST VOLTAGE (V)	230	θ @50% (H,V)	113,111DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.02	0.04	0.07	0.10	0.12	0.14	0.16	0.16	0.16	0.15	0.13	0.10	0.07	0.05	0.02	0.01	0.00	1.51	0.00
90	0.00	0.02	0.04	0.07	0.10	0.12	0.14	0.16	0.16	0.16	0.15	0.13	0.10	0.07	0.05	0.02	0.01	0.00	1.51	0.00
80	0.01	0.05	0.15	0.32	0.52	0.75	0.90	0.99	1.04	1.02	0.93	0.80	0.63	0.42	0.24	0.11	0.03	0.00	8.90	0.00
70	0.01	0.11	0.45	1.52	3.03	4.72	5.90	6.84	7.27	7.14	6.48	5.35	4.07	2.38	1.02	0.30	0.07	0.01	56.7	34.3
60	0.02	0.20	1.59	5.21	9.47	14.1	18.2	21.0	22.5	22.2	20.4	17.3	12.9	8.28	4.01	1.00	0.14	0.01	178	174
50	0.02	0.42	3.58	9.67	16.5	24.4	30.7	35.6	38.0	37.7	34.9	29.8	23.3	15.1	8.31	2.54	0.26	0.02	311	308
40	0.03	0.78	5.57	13.3	22.2	31.3	39.0	44.4	47.1	46.8	43.6	37.9	30.2	20.9	11.9	4.38	0.49	0.02	400	398
30	0.04	1.18	7.15	16.0	26.1	36.1	44.5	50.5	53.5	53.1	49.7	43.4	35.1	25.0	14.7	5.97	0.76	0.03	463	461
	0.04	1.52	8.25	17.9	29.0	39.6	48.6	55.1	58.2	57.7	54.1	47.4	38.6	28.1	16.9	7.13	1.01	0.03	509	508
	0.04	1.72	8.89	19.2	30.8	41.9	51.3	58.1	61.3	60.6	57.2	50.5	41.3	30.2	18.3	7.80	1.16	0.03	540	539
	0.04	1.77	9.08	19.6	31.3	42.5	51.9	58.5	61.9	62.5	59.0	52.0	42.4	31.1	18.8	8.02	1.20	0.03	552	551
	0.04	1.66	8.80	19.2	30.7	41.6	50.8	57.7	61.4	61.7	58.2	51.3	41.9	30.6	18.5	7.75	1.12	0.03	543	542
	0.04	1.39	8.02	17.9	29.1	39.7	48.8	55.5	59.1	59.3	55.9	49.1	39.9	29.0	17.2	6.92	0.92	0.03	518	517
-30	0.03	1.00	6.71	15.8	26.5	36.6	45.2	51.6	54.9	54.9	51.7	45.2	36.5	26.1	15.0	5.52	0.64	0.02	474	473
-40	0.02	0.58	4.86	13.0	22.5	31.9	39.7	45.5	48.5	48.5	45.5	39.6	31.6	21.9	11.8	3.67	0.36	0.02	409	408
-50	0.02	0.26	2.69	8.91	16.9	25.0	31.6	36.6	39.1	39.0	36.4	31.3	24.4	15.9	7.52	1.80	0.18	0.01	318	315
-60	0.01	0.12	0.89	4.34	9.85	15.8	21.0	24.6	26.3	26.2	24.3	20.5	14.9	8.51	3.18	0.57	0.09	0.01	201	197
-70	0.01	0.06	0.22	0.90	2.89	5.69	8.80	10.8	11.5	11.3	10.3	7.93	4.58	1.98	0.57	0.16	0.04	0.00	77.8	64.0
-80	0.00	0.02	0.05	0.09	0.17	0.26	0.39	0.47	0.50	0.46	0.38	0.29	0.19	0.12	0.06	0.03	0.01	0.00	3.49	0.00
-90	0.00	0.02	0.05	0.09	0.17	0.26	0.39	0.47	0.50	0.46	0.38	0.29	0.19	0.12	0.06	0.03	0.01	0.00	3.49	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	0.42	12.8	77.0	183	308	432	537	614	652	650	609	530	422	296	168	63.7	8.49	0.30	5564	---
Φ a	0.00	7.20	72.2	178	303	427	533	610	648	646	605	526	418	291	163	58.2	2.77	0.00	---	5489


one-half-peak spread: U:54.4,D:49.6 , L:56.1,R:56.9 NEMA Beam Type: Type 7

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:29 November 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.13V I:0.2278A P:52.133W PF:0.9945 Freq:50.01Hz Lamp Flux:5598.48x1 lm		
NAME: BLP-FL50WAC	TYPE:	WEIGHT:1.24Kg
SPEC.:	DIM.: 0.158X0.203X0.048	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

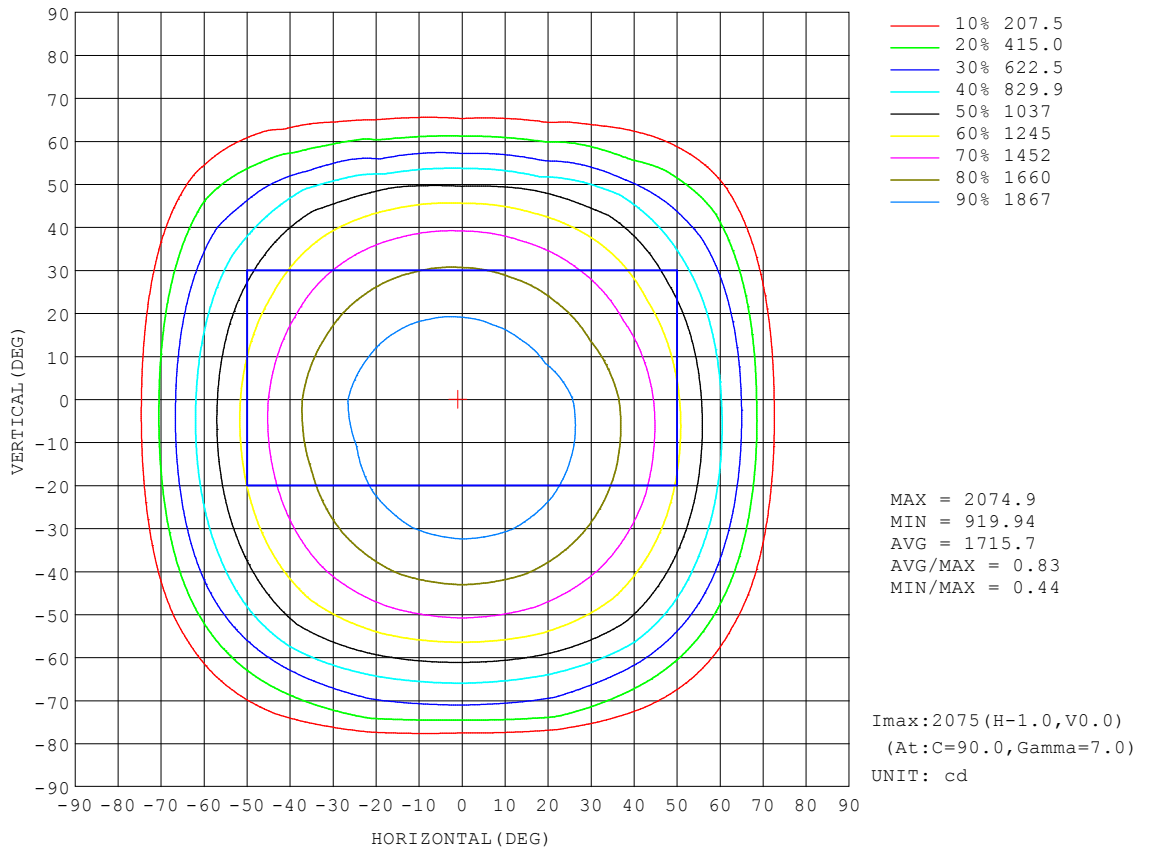


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:29 November 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**


Test:U:230.13V I:0.2278A P:52.133W PF:0.9945 Freq:50.01Hz Lamp Flux:5598.48x1 lm		
NAME: BLP-FL50WAC	TYPE:	WEIGHT:1.24Kg
SPEC.:	DIM.: 0.158X0.203X0.048	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

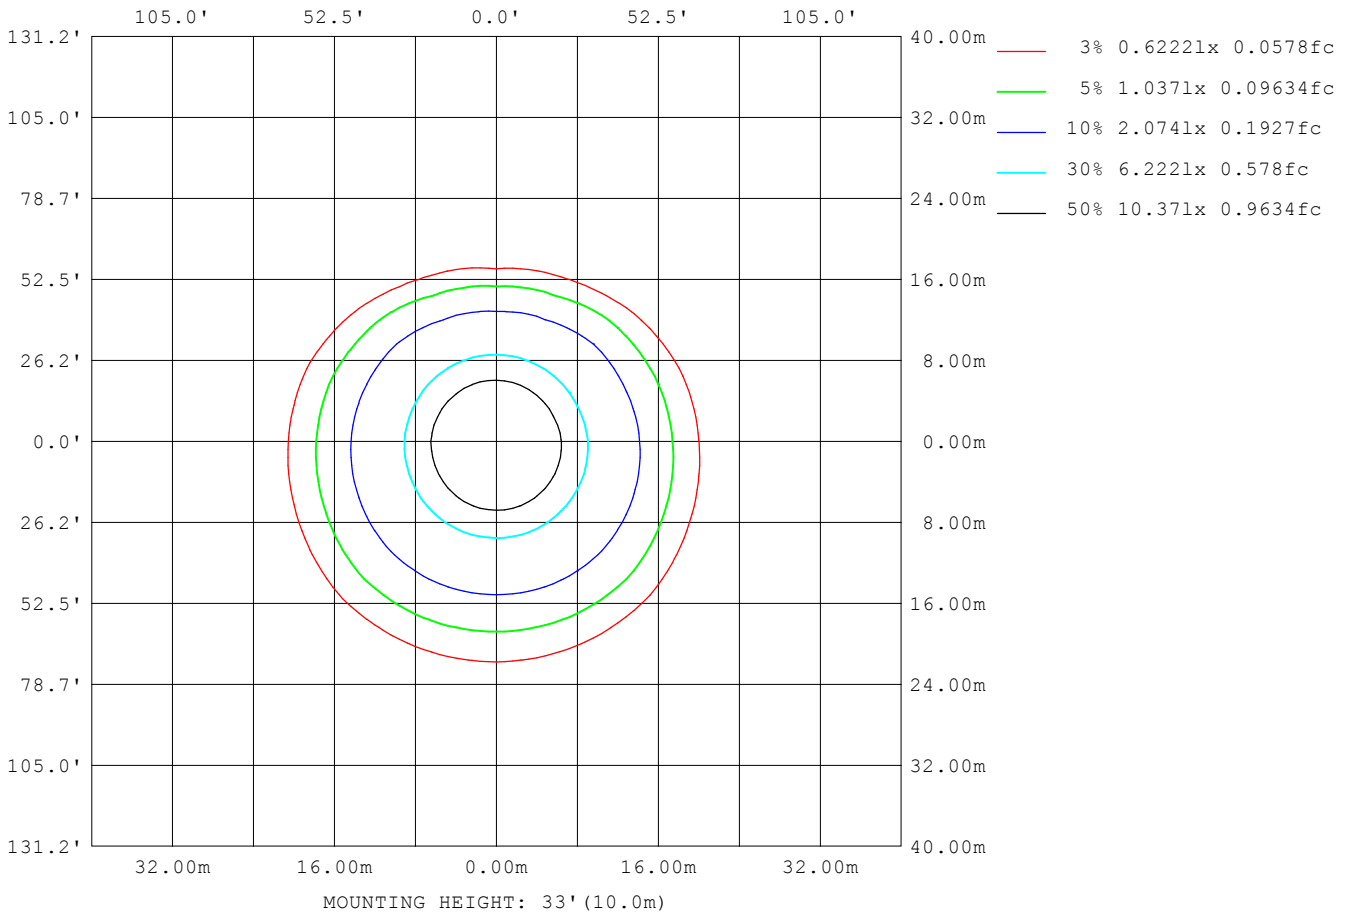

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:29 November 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

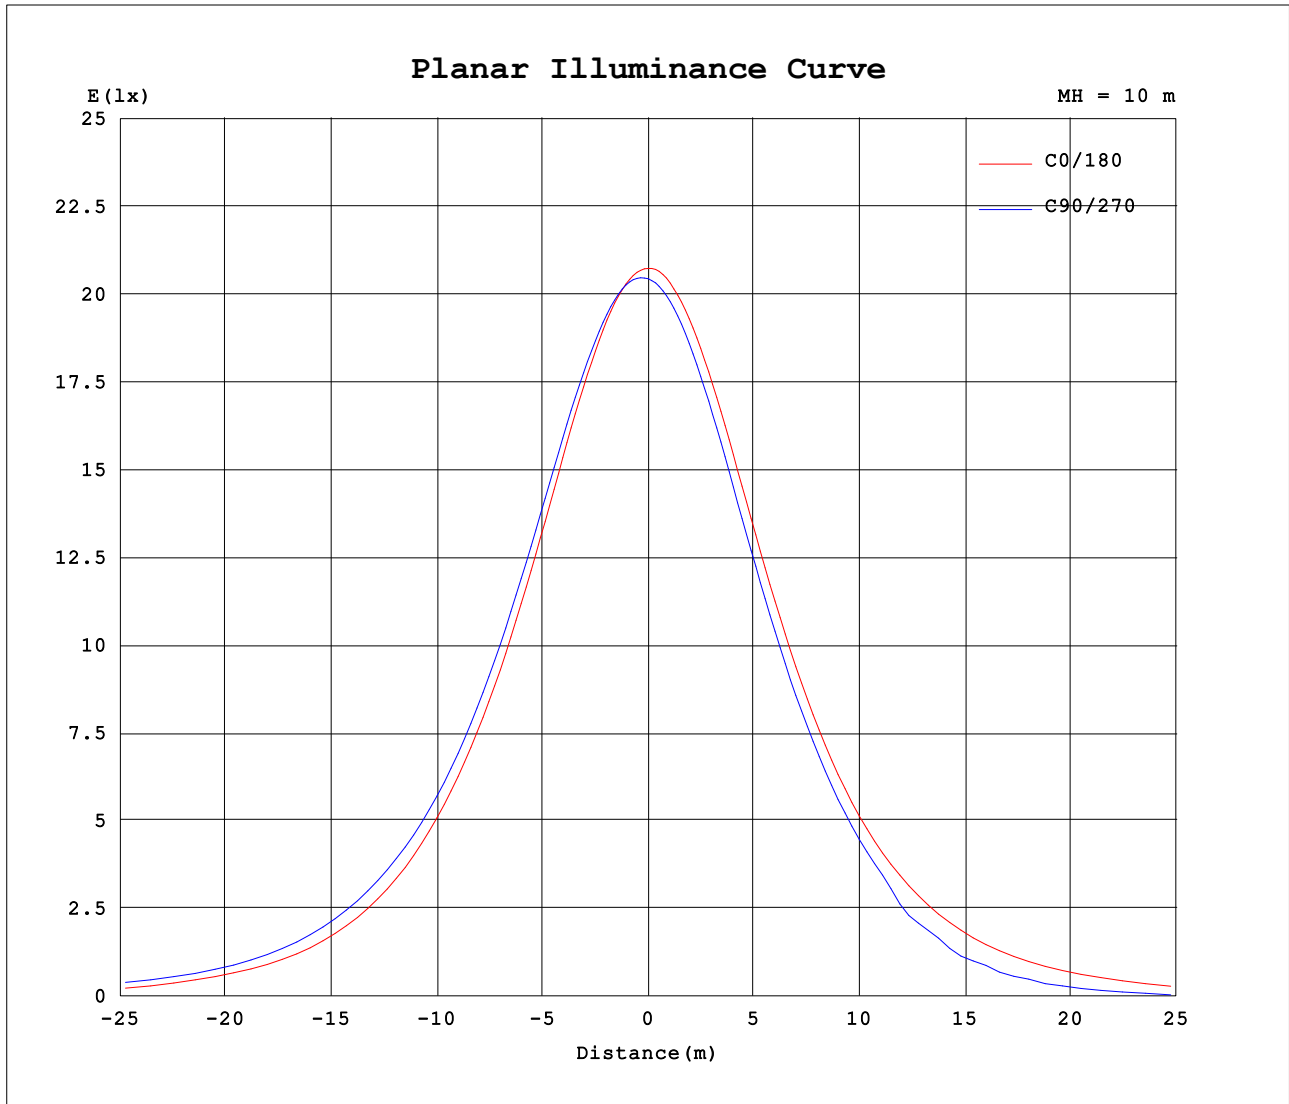


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:29 November 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

**AAI Figure**

Test:U:230.13V I:0.2278A P:52.133W PF:0.9945 Freq:50.01Hz Lamp Flux:5598.48x1 lm		
NAME: BLP-FL50WAC	TYPE:	WEIGHT:1.24Kg
SPEC.:	DIM.: 0.158X0.203X0.048	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

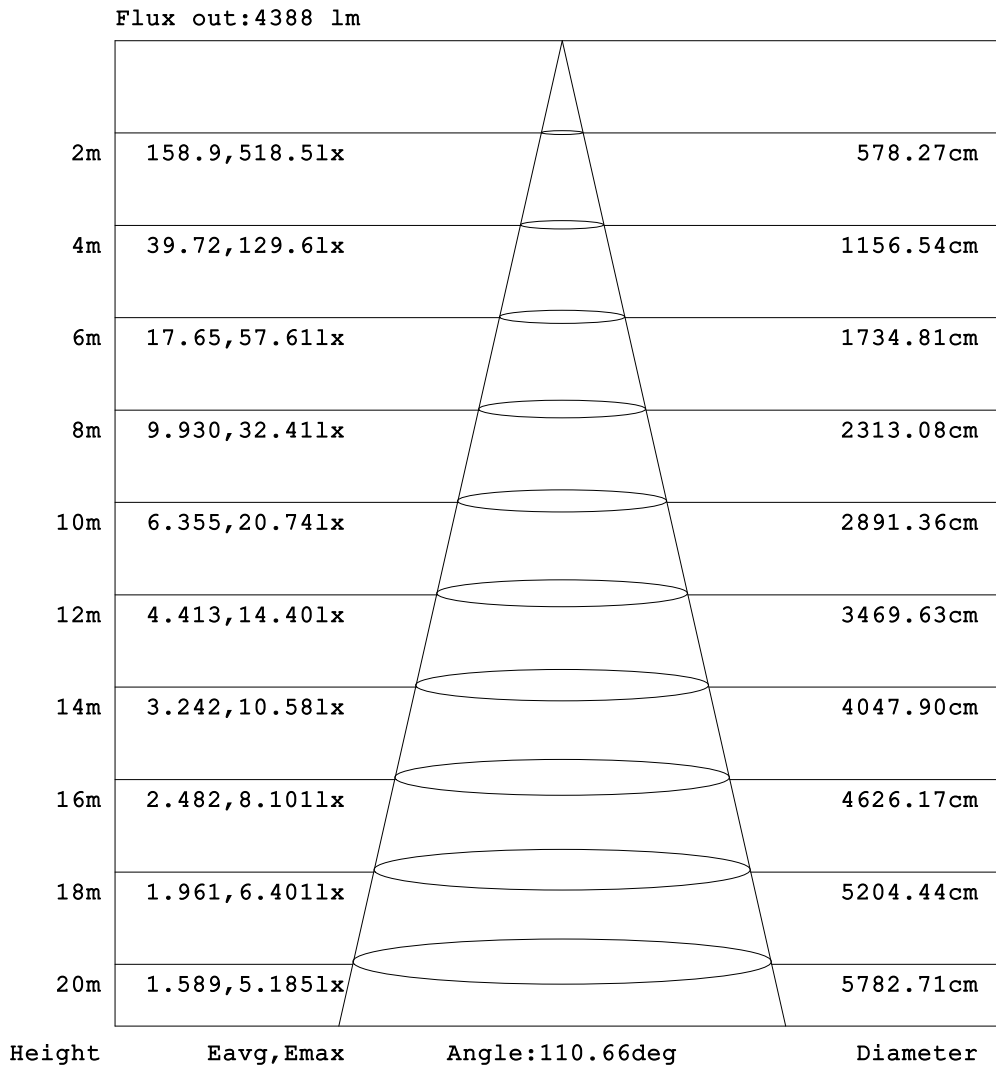

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:29 November 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.13V I:0.2278A P:52.133W PF:0.9945 Freq:50.01Hz Lamp Flux:5598.48x1 lm		
NAME: BLP-FL50WAC	TYPE:	WEIGHT:1.24Kg
SPEC.:	DIM.: 0.158X0.203X0.048	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

Table--1

UNIT: cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.79	1.09	1.59	2.30	3.18	4.11	5.04	5.96	6.90	7.83	8.65	9.35	9.95	10.5	10.9	11.3	11.5	11.7	11.9
-170	0.79	1.08	1.56	2.24	3.08	3.97	4.85	5.72	6.60	7.44	8.20	8.83	9.31	9.71	10.1	10.4	10.6	10.7	10.8
-160	0.79	1.06	1.50	2.11	2.87	3.68	4.49	5.28	6.05	6.81	7.49	8.10	8.61	9.04	9.40	9.70	9.94	10.1	10.1
-150	0.79	1.02	1.41	1.93	2.57	3.27	3.98	4.67	5.33	5.97	6.59	7.15	7.65	8.07	8.40	8.65	8.85	8.99	9.04
-140	0.79	0.98	1.30	1.72	2.21	2.78	3.36	3.93	4.48	4.99	5.47	5.92	6.33	6.69	6.97	7.18	7.38	7.50	7.53
-130	0.79	0.93	1.18	1.48	1.84	2.24	2.67	3.09	3.51	3.89	4.25	4.57	4.88	5.14	5.35	5.53	5.67	5.75	5.77
-120	0.79	0.88	1.06	1.25	1.48	1.74	1.98	2.23	2.50	2.74	2.96	3.19	3.35	3.50	3.62	3.75	3.85	3.90	3.90
-110	0.79	0.83	0.93	1.05	1.16	1.29	1.39	1.51	1.62	1.72	1.81	1.89	1.96	2.00	2.05	2.11	2.15	2.17	2.16
-100	0.79	0.78	0.81	0.85	0.89	0.93	0.95	0.97	0.98	1.00	1.01	1.00	1.00	0.98	0.98	0.99	1.00	0.99	0.98
-90	0.79	0.77	0.75	0.73	0.72	0.69	0.67	0.64	0.61	0.58	0.56	0.53	0.51	0.48	0.47	0.47	0.46	0.46	0.46
-80	0.79	1.38	2.42	3.85	5.68	7.86	10.4	13.4	17.1	21.9	28.4	36.6	48.7	59.9	72.5	78.9	81.5	80.6	76.4
-70	0.79	2.38	5.48	10.1	16.4	25.8	55.3	119	203	289	369	444	512	570	615	638	655	666	670
-60	0.79	3.61	9.55	19.0	37.9	111	239	376	504	622	734	827	901	961	1010	1047	1072	1086	1088
-50	0.79	4.94	14.4	33.0	121	281	461	634	789	929	1061	1162	1242	1315	1375	1419	1449	1469	1478
-40	0.79	6.30	19.2	66.2	233	443	654	826	995	1147	1278	1387	1475	1551	1615	1669	1700	1720	1729
-30	0.79	7.54	24.1	115	329	572	781	968	1148	1302	1429	1540	1635	1715	1782	1835	1873	1893	1904
-20	0.79	8.50	28.8	159	399	656	864	1065	1247	1399	1528	1639	1734	1817	1888	1940	1978	2001	2012
-10	0.79	9.06	31.7	184	437	697	907	1115	1297	1450	1583	1695	1787	1865	1931	1983	2020	2044	2057
0	0.79	9.23	32.1	187	441	701	908	1116	1299	1454	1591	1708	1806	1892	1960	2012	2047	2069	2074
10	0.79	8.99	30.6	172	417	669	869	1067	1244	1396	1530	1644	1740	1821	1887	1936	1968	1983	1977
20	0.79	8.36	27.1	138	359	600	792	973	1140	1285	1414	1528	1622	1700	1762	1808	1838	1853	1853
30	0.79	7.36	22.5	91.1	269	494	681	838	991	1130	1256	1365	1454	1525	1584	1628	1657	1673	1673
40	0.79	6.12	17.9	48.9	171	351	531	663	777	918	1035	1139	1223	1290	1344	1383	1413	1427	1427
50	0.79	4.79	13.2	26.8	75.2	184	322	430	520	614	680	799	867	902	921	986	1016	1014	991
60	0.79	3.50	8.75	16.4	27.3	56.1	113	164	234	273	313	361	383	432	424	453	478	476	456
70	0.79	2.33	5.05	8.75	13.4	18.6	24.4	32.8	42.5	47.9	52.6	63.2	70.1	70.4	64.6	70.3	73.7	72.6	68.1
80	0.79	1.39	2.31	3.46	4.79	6.16	7.44	8.72	9.86	10.8	11.8	12.6	13.2	13.5	13.8	14.2	14.4	14.4	14.1
90	0.79	0.81	0.83	0.85	0.87	0.90	0.92	0.94	0.96	0.99	1.00	1.02	1.03	1.05	1.06	1.07	1.07	1.08	1.08
100	0.79	0.82	0.89	0.98	1.08	1.19	1.30	1.42	1.55	1.69	1.80	1.92	2.03	2.13	2.22	2.28	2.32	2.35	2.36
110	0.79	0.86	1.02	1.19	1.39	1.62	1.88	2.16	2.46	2.76	3.04	3.32	3.56	3.77	3.96	4.09	4.18	4.25	4.29
120	0.79	0.92	1.15	1.42	1.75	2.15	2.59	3.06	3.54	4.00	4.44	4.81	5.14	5.44	5.69	5.87	6.01	6.10	6.14
130	0.79	0.97	1.27	1.66	2.15	2.71	3.33	3.96	4.58	5.15	5.70	6.18	6.63	7.03	7.38	7.65	7.82	7.93	7.97
140	0.79	1.01	1.38	1.89	2.52	3.24	4.00	4.75	5.46	6.13	6.80	7.44	8.01	8.47	8.86	9.15	9.33	9.45	9.49
150	0.79	1.05	1.48	2.08	2.84	3.67	4.53	5.36	6.16	6.96	7.73	8.44	9.05	9.54	9.91	10.2	10.4	10.5	10.5
160	0.79	1.07	1.55	2.22	3.07	3.97	4.88	5.76	6.66	7.55	8.38	9.08	9.68	10.2	10.5	10.8	11.0	11.1	11.2
170	0.79	1.09	1.59	2.30	3.18	4.12	5.05	5.97	6.92	7.84	8.67	9.38	9.96	10.4	10.9	11.2	11.5	11.5	11.5
180	0.79	1.09	1.59	2.30	3.18	4.11	5.04	5.96	6.90	7.83	8.65	9.35	9.95	10.5	10.9	11.3	11.5	11.7	11.8

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:29 November 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.13V I:0.2278A P:52.133W PF:0.9945 Freq:50.01Hz Lamp Flux:5598.48x1 lm		
NAME: BLP-FL50WAC	TYPE:	WEIGHT:1.24Kg
SPEC.:	DIM.: 0.158X0.203X0.048	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.125X0.12	Shielding Angle:

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	11.6	11.3	11.0	10.7	10.4	9.91	9.38	8.78	8.07	7.27	6.39	5.47	4.56	3.63	2.74	1.96	1.36	0.93
-170	11.0	10.9	10.7	10.4	10.0	9.58	9.09	8.48	7.78	6.99	6.15	5.28	4.40	3.51	2.66	1.92	1.35	0.93
-160	10.2	10.2	9.96	9.67	9.34	8.94	8.46	7.88	7.21	6.48	5.70	4.91	4.11	3.29	2.51	1.84	1.32	0.93
-150	9.07	8.99	8.84	8.61	8.31	7.93	7.49	6.97	6.39	5.75	5.08	4.39	3.67	2.96	2.30	1.73	1.28	0.93
-140	7.57	7.52	7.38	7.20	6.96	6.63	6.27	5.84	5.37	4.85	4.31	3.73	3.15	2.58	2.05	1.61	1.23	0.93
-130	5.81	5.78	5.69	5.55	5.38	5.16	4.88	4.57	4.20	3.83	3.42	3.01	2.57	2.16	1.78	1.45	1.17	0.93
-120	3.93	3.92	3.86	3.77	3.68	3.55	3.39	3.20	2.99	2.77	2.52	2.26	2.01	1.75	1.52	1.30	1.11	0.93
-110	2.19	2.21	2.19	2.16	2.15	2.12	2.08	2.01	1.93	1.84	1.73	1.62	1.50	1.39	1.27	1.15	1.04	0.93
-100	1.01	1.03	1.05	1.05	1.07	1.10	1.13	1.14	1.14	1.14	1.13	1.12	1.10	1.08	1.04	1.01	0.97	0.93
-90	0.47	0.47	0.48	0.49	0.51	0.55	0.58	0.61	0.65	0.68	0.72	0.75	0.79	0.82	0.84	0.87	0.90	0.93
-80	74.0	68.6	60.2	49.0	35.4	30.1	24.9	19.7	15.4	12.4	9.80	7.43	5.49	3.80	2.45	1.49	0.95	0.93
-70	663	649	630	604	552	478	397	309	220	140	75.2	34.6	19.7	12.6	7.23	3.62	1.48	0.93
-60	1083	1067	1039	998	944	877	794	692	568	433	292	163	63.9	27.1	14.6	6.73	2.28	0.93
-50	1469	1449	1419	1373	1309	1234	1148	1036	893	735	557	364	191	70.5	24.0	10.6	3.22	0.93
-40	1721	1702	1671	1617	1551	1474	1381	1265	1126	959	775	573	342	151	40.3	14.6	4.20	0.93
-30	1897	1879	1843	1789	1723	1641	1544	1431	1290	1123	925	720	474	233	66.2	18.2	5.13	0.93
-20	2009	1991	1954	1903	1833	1749	1651	1538	1398	1225	1025	807	568	296	95.9	21.2	5.85	0.93
-10	2059	2042	2006	1955	1885	1800	1699	1583	1443	1273	1072	847	616	331	112	23.0	6.27	0.93
0	2066	2044	2004	1952	1879	1795	1692	1577	1437	1265	1065	842	619	332	113	23.3	6.39	0.93
10	1961	1936	1898	1845	1778	1703	1610	1501	1366	1201	1010	799	584	311	104	22.2	6.20	0.93
20	1841	1815	1777	1725	1658	1579	1484	1373	1239	1084	905	718	508	259	81.8	19.9	5.72	0.93
30	1663	1637	1600	1551	1487	1411	1321	1209	1074	920	759	605	393	182	51.3	16.7	4.96	0.93
40	1418	1396	1358	1313	1255	1184	1096	985	855	703	588	440	253	107	31.0	13.1	4.04	0.93
50	1006	996	953	891	872	826	744	627	546	457	352	231	118	43.0	19.4	9.41	3.09	0.93
60	469	464	432	409	399	348	323	271	234	171	113	69.9	33.3	19.4	11.9	5.96	2.21	0.93
70	68.2	66.5	63.8	59.7	61.1	59.4	49.7	42.1	35.4	30.0	23.6	17.8	13.4	9.36	5.92	3.26	1.45	0.93
80	14.1	13.8	13.3	12.7	12.0	11.3	10.5	9.51	8.40	7.37	6.25	5.10	4.02	3.04	2.16	1.43	0.96	0.93
90	1.08	1.08	1.09	1.09	1.08	1.07	1.06	1.04	1.03	1.01	0.98	0.96	0.93	0.92	0.92	0.92	0.93	0.93
100	2.36	2.35	2.32	2.28	2.20	2.12	2.02	1.92	1.81	1.67	1.54	1.41	1.30	1.21	1.14	1.06	0.99	0.93
110	4.27	4.21	4.13	4.02	3.85	3.65	3.43	3.18	2.92	2.63	2.33	2.04	1.76	1.55	1.37	1.21	1.07	0.93
120	6.09	6.00	5.86	5.69	5.45	5.16	4.84	4.50	4.10	3.68	3.24	2.78	2.34	1.96	1.64	1.36	1.13	0.93
130	7.93	7.82	7.65	7.38	7.03	6.63	6.20	5.71	5.18	4.65	4.09	3.51	2.94	2.41	1.92	1.52	1.20	0.93
140	9.43	9.30	9.10	8.79	8.41	7.95	7.41	6.80	6.15	5.48	4.82	4.16	3.50	2.82	2.19	1.67	1.25	0.93
150	10.4	10.3	10.1	9.79	9.41	8.92	8.34	7.67	6.93	6.16	5.44	4.71	3.95	3.17	2.42	1.79	1.30	0.93
160	11.1	11.0	10.7	10.4	9.99	9.52	8.93	8.26	7.54	6.75	5.94	5.13	4.29	3.44	2.60	1.88	1.33	0.93
170	11.5	11.3	11.0	10.6	10.2	9.82	9.30	8.67	7.95	7.13	6.27	5.38	4.50	3.59	2.71	1.94	1.36	0.93
180	11.6	11.3	11.0	10.7	10.4	9.91	9.38	8.78	8.07	7.27	6.39	5.47	4.56	3.63	2.74	1.96	1.36	0.93

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:29 November 2017

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity:65.0%  
 Test Distance:7.680m [K=1.0000]  
 Remarks: