
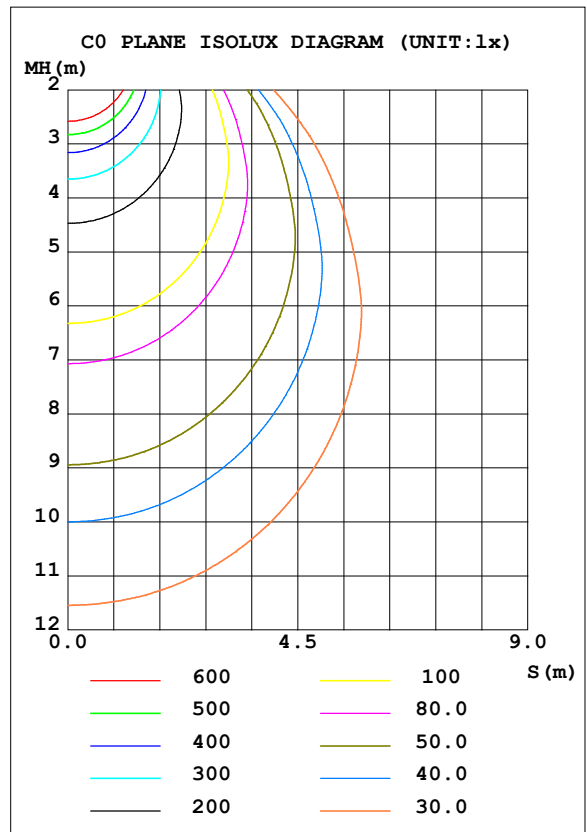


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 152.99 lm/W			
MODEL		I _{max} (cd)	3980	S/MH (C0/180)	1.30
NOMINAL POWER (W)	75	LOR (%)	100.0	S/MH (C90/270)	1.29
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	11052	η UP, DN (C0-180)	0.3, 50.0
NOMINAL FLUX (lm)	11051.6	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 49.4
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	99.4	CIBSE SHR MAX	1.35

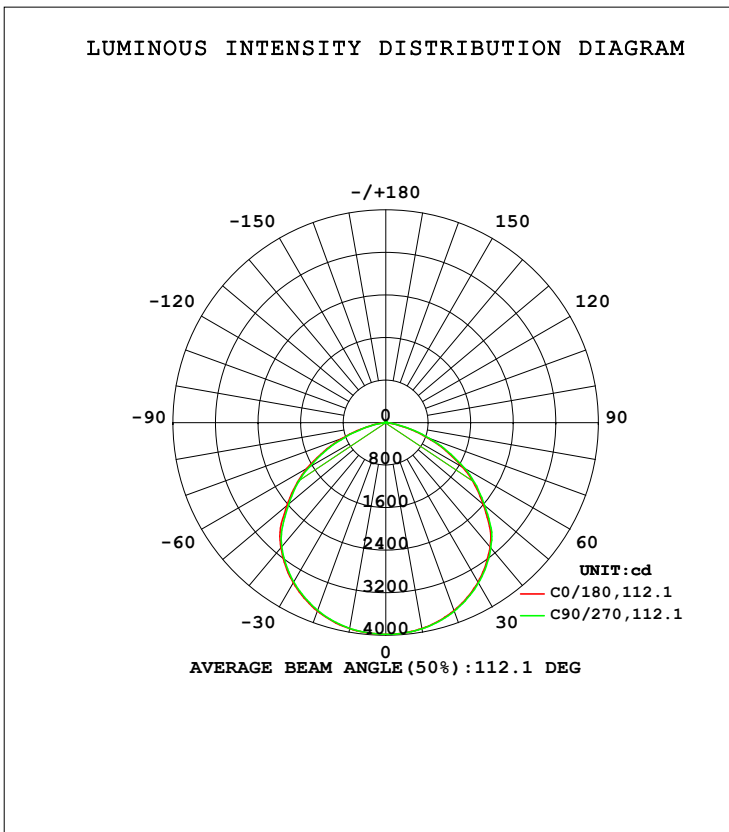

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3931	3932	3936	3936	3933	3932	3927	3926	0- 10	377.7	377.7	3.42,3.42
20	3759	3763	3771	3775	3767	3763	3754	3751	10- 20	1091	1469	13.3,13.3
30	3468	3472	3486	3491	3479	3473	3460	3456	20- 30	1675	3144	28.4,28.4
40	3052	3058	3073	3083	3069	3061	3044	3036	30- 40	2053	5197	47,47
50	2393	2403	2430	2448	2427	2417	2387	2375	40- 50	2130	7327	66.3,66.3
60	1665	1676	1713	1737	1708	1693	1653	1636	50- 60	1841	9168	83,83
70	832.8	839.6	876.7	897.3	872.7	859.7	828.4	806.9	60- 70	1251	10418	94.3,94.3
80	163.2	167.3	188.2	197.5	192.6	182.9	163.6	151.7	70- 80	513.3	10932	98.9,98.9
90	1.857	1.842	1.819	1.836	1.735	1.728	1.769	1.810	80- 90	52.66	10984	99.4,99.4
100	3.875	3.839	3.735	3.660	3.513	3.536	3.651	3.724	90-100	2.863	10987	99.4,99.4
110	6.957	6.899	6.762	6.659	6.479	6.508	6.642	6.721	100-110	5.414	10993	99.5,99.5
120	10.38	10.30	10.20	10.07	9.892	9.908	10.06	10.11	110-120	8.312	11001	99.5,99.5
130	13.75	13.65	13.47	13.39	13.32	13.33	13.45	13.50	120-130	10.57	11012	99.6,99.6
140	16.70	16.63	16.39	16.34	16.41	16.42	16.46	16.55	130-140	11.59	11023	99.7,99.7
150	18.88	18.81	18.69	18.69	18.98	18.99	18.97	19.06	140-150	11.10	11034	99.8,99.8
160	20.66	20.61	20.65	20.58	20.84	20.90	20.92	20.88	150-160	9.169	11043	99.9,99.9
170	21.75	21.69	21.78	21.76	22.17	22.32	22.28	22.13	160-170	6.055	11049	100,100
180	22.49	22.74	22.79	22.61	22.51	22.74	22.80	22.63	170-180	2.121	11052	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:

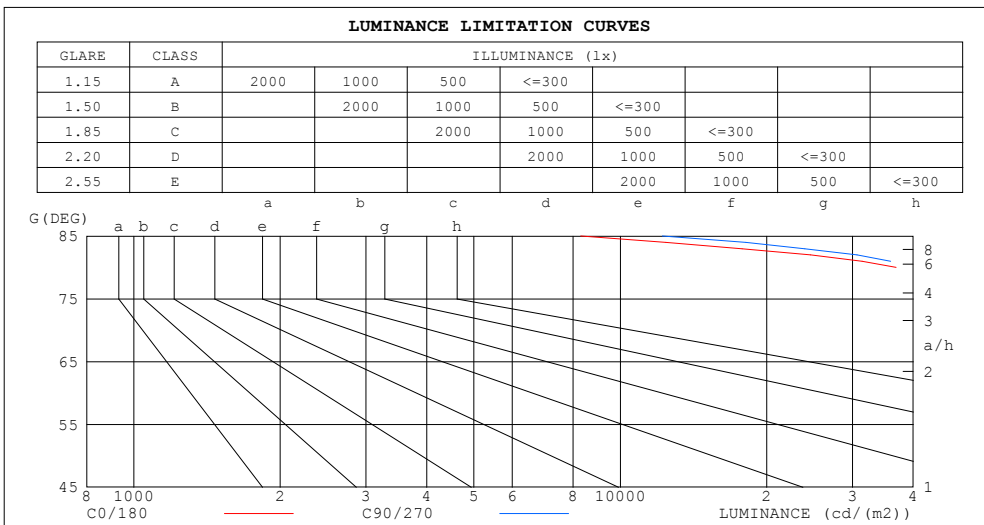

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8291	12197
80	36879	42292
75	68970	74493
70	95558	100042
65	115690	118872
60	130676	133707
55	140053	141904
50	146112	147547
45	153398	154549


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.83	.79	.76	.80	.77	.74	.72
3.0	.81	.73	.67	.80	.72	.67	.77	.70	.65	.74	.69	.64	.71	.67	.63	.61
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.54	.52
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

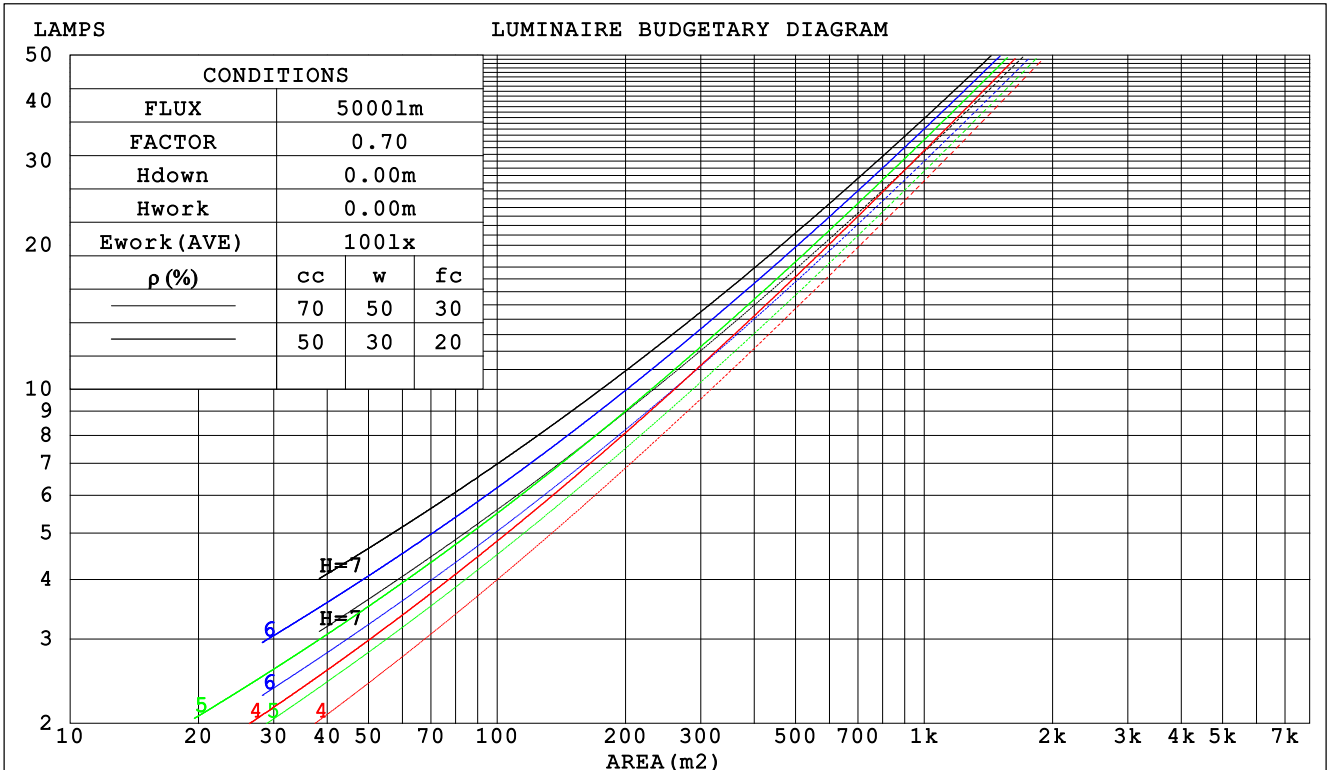

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.282	.160	.051	.274	.157	.050	.261	.150	.048	.249	.143	.046	.237	.137	.044	
2.0	.273	.149	.046	.266	.147	.045	.255	.142	.044	.244	.137	.043	.234	.132	.042	
3.0	.257	.137	.041	.251	.134	.040	.241	.130	.040	.231	.126	.039	.222	.123	.038	
4.0	.239	.124	.037	.234	.123	.036	.225	.119	.036	.216	.116	.035	.208	.113	.034	
5.0	.223	.114	.033	.219	.112	.033	.210	.110	.032	.203	.107	.032	.195	.104	.031	
6.0	.208	.104	.030	.204	.103	.030	.197	.101	.029	.190	.099	.029	.183	.097	.029	
7.0	.194	.096	.027	.191	.095	.027	.184	.093	.027	.178	.091	.027	.172	.089	.026	
8.0	.182	.089	.025	.179	.088	.025	.173	.086	.025	.168	.085	.024	.162	.083	.024	
9.0	.171	.083	.023	.168	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.161	.077	.021	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.183	.161	.141	.157	.138	.122	.107	.095	.084	.062	.055	.049	.020	.018	.016	
2.0	.174	.137	.105	.149	.118	.091	.102	.081	.063	.059	.047	.037	.019	.015	.012	
3.0	.167	.119	.081	.143	.103	.070	.098	.071	.049	.057	.042	.029	.018	.014	.010	
4.0	.159	.106	.065	.137	.091	.056	.094	.064	.039	.054	.037	.023	.017	.012	.008	
5.0	.152	.095	.053	.131	.082	.046	.090	.057	.033	.052	.034	.019	.017	.011	.006	
6.0	.145	.087	.045	.125	.075	.039	.086	.053	.028	.050	.031	.016	.016	.010	.005	
7.0	.139	.080	.039	.119	.069	.034	.082	.048	.024	.048	.029	.014	.015	.009	.005	
8.0	.132	.074	.034	.114	.064	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	
9.0	.126	.069	.030	.109	.060	.026	.075	.042	.019	.044	.025	.011	.014	.008	.004	
10.0	.121	.065	.027	.104	.056	.024	.072	.040	.017	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm										
NAME: BLP-SHBL75WB					TYPE:			WEIGHT:3.76Kg		
SPEC.:					DIM.: 0.28*0.28			SERIAL No.:		
MFR.: Shenzhen Brillloop Lighting					SUR.:0.16*0.16			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.1	31.5	30.3	31.7	31.9	30.1	31.6	30.4	31.8	32.0
3H	31.1	32.5	31.4	32.7	33.0	31.2	32.6	31.5	32.8	33.1
4H	31.4	32.6	31.7	32.9	33.2	31.5	32.8	31.8	33.0	33.3
6H	31.4	32.6	31.7	32.9	33.2	31.6	32.8	31.9	33.1	33.3
8H	31.4	32.5	31.7	32.8	33.1	31.6	32.7	31.9	33.0	33.3
12H	31.3	32.4	31.7	32.7	33.1	31.5	32.6	31.9	32.9	33.2
4H 2H	30.5	31.8	30.9	32.1	32.4	30.6	31.9	30.9	32.1	32.4
3H	31.7	32.8	32.1	33.1	33.5	31.8	32.9	32.2	33.2	33.6
4H	32.1	33.1	32.4	33.4	33.7	32.2	33.2	32.6	33.5	33.9
6H	32.1	33.0	32.5	33.4	33.8	32.3	33.2	32.7	33.6	33.9
8H	32.1	33.0	32.5	33.3	33.7	32.3	33.1	32.7	33.5	33.9
12H	32.1	32.8	32.5	33.2	33.7	32.3	33.0	32.7	33.4	33.8
8H 4H	32.1	33.0	32.5	33.3	33.7	32.3	33.1	32.7	33.5	33.9
6H	32.3	32.9	32.7	33.4	33.8	32.4	33.1	32.9	33.5	34.0
8H	32.3	32.9	32.7	33.3	33.8	32.4	33.0	32.9	33.5	33.9
12H	32.2	32.7	32.7	33.2	33.7	32.4	32.9	32.9	33.4	33.9
12H 4H	32.1	32.9	32.5	33.2	33.7	32.2	33.0	32.7	33.4	33.8
6H	32.2	32.8	32.7	33.3	33.7	32.4	33.0	32.9	33.4	33.9
8H	32.2	32.8	32.7	33.2	33.7	32.4	32.9	32.9	33.4	33.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				
1.5H	+ 0.3 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 11052 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 8.3)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	60	74	68	59	52
1.25	85	75	68	83	74	68	81	73	67	60
1.50	90	80	74	88	80	73	85	78	72	65
2.00	97	89	83	95	87	82	91	85	80	73
2.50	100	93	87	98	92	86	94	89	85	76
3.00	104	97	92	101	96	91	97	93	89	80
4.00	107	102	98	105	100	96	101	97	94	85
5.00	110	105	101	107	103	100	103	99	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:

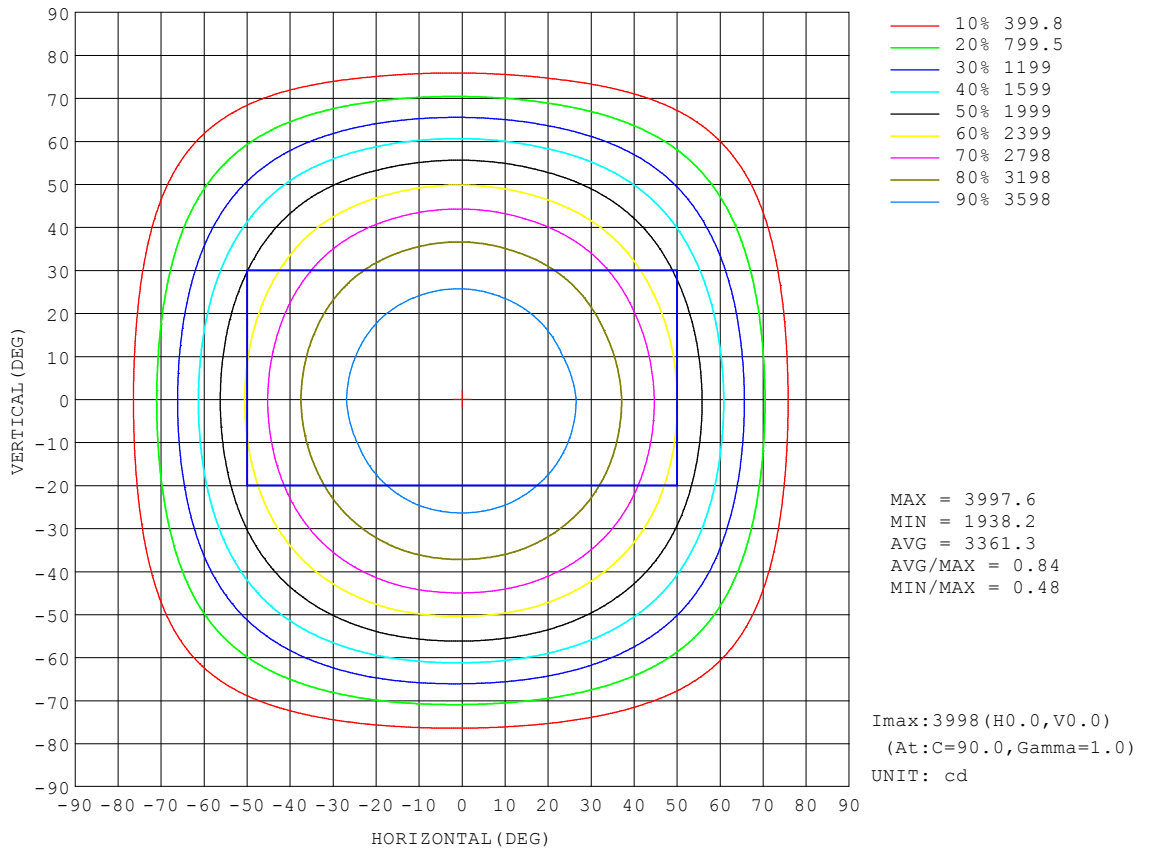


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:

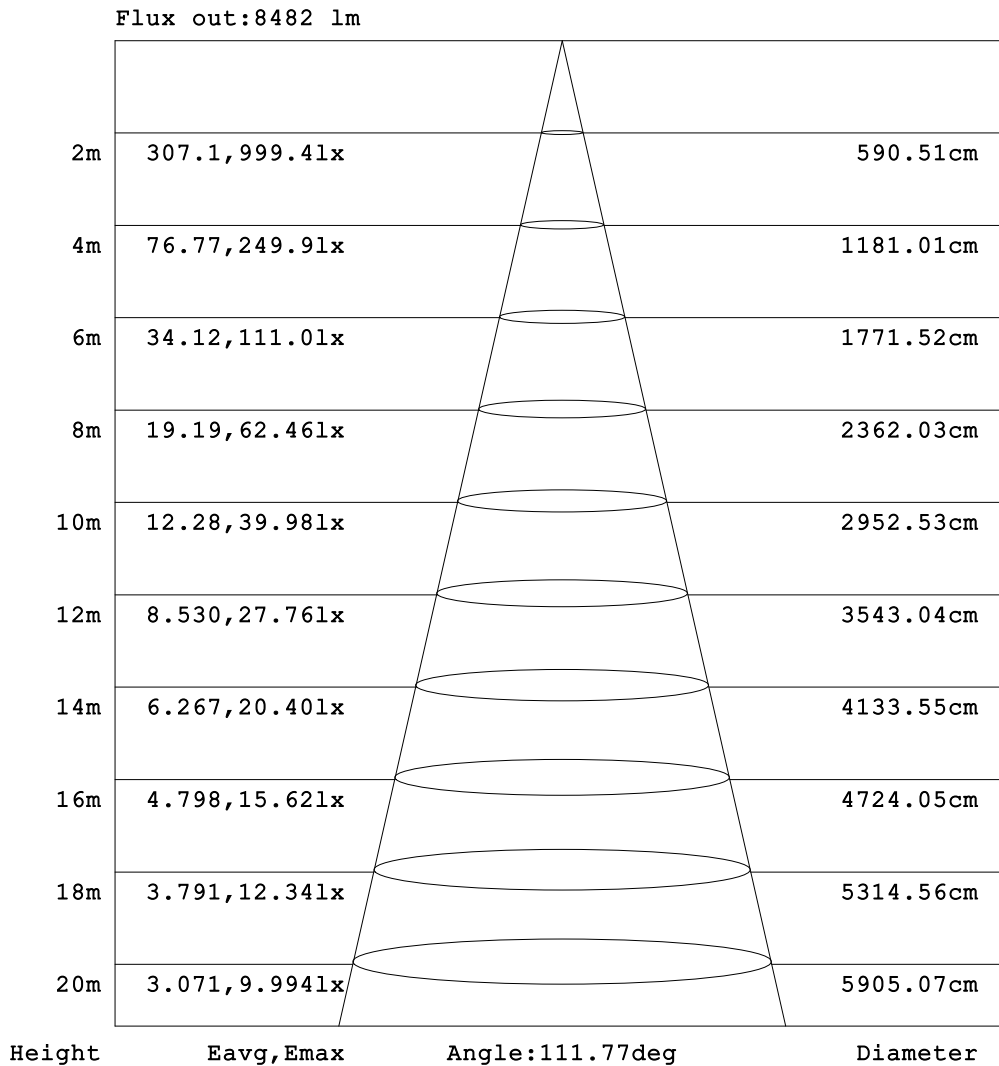


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:

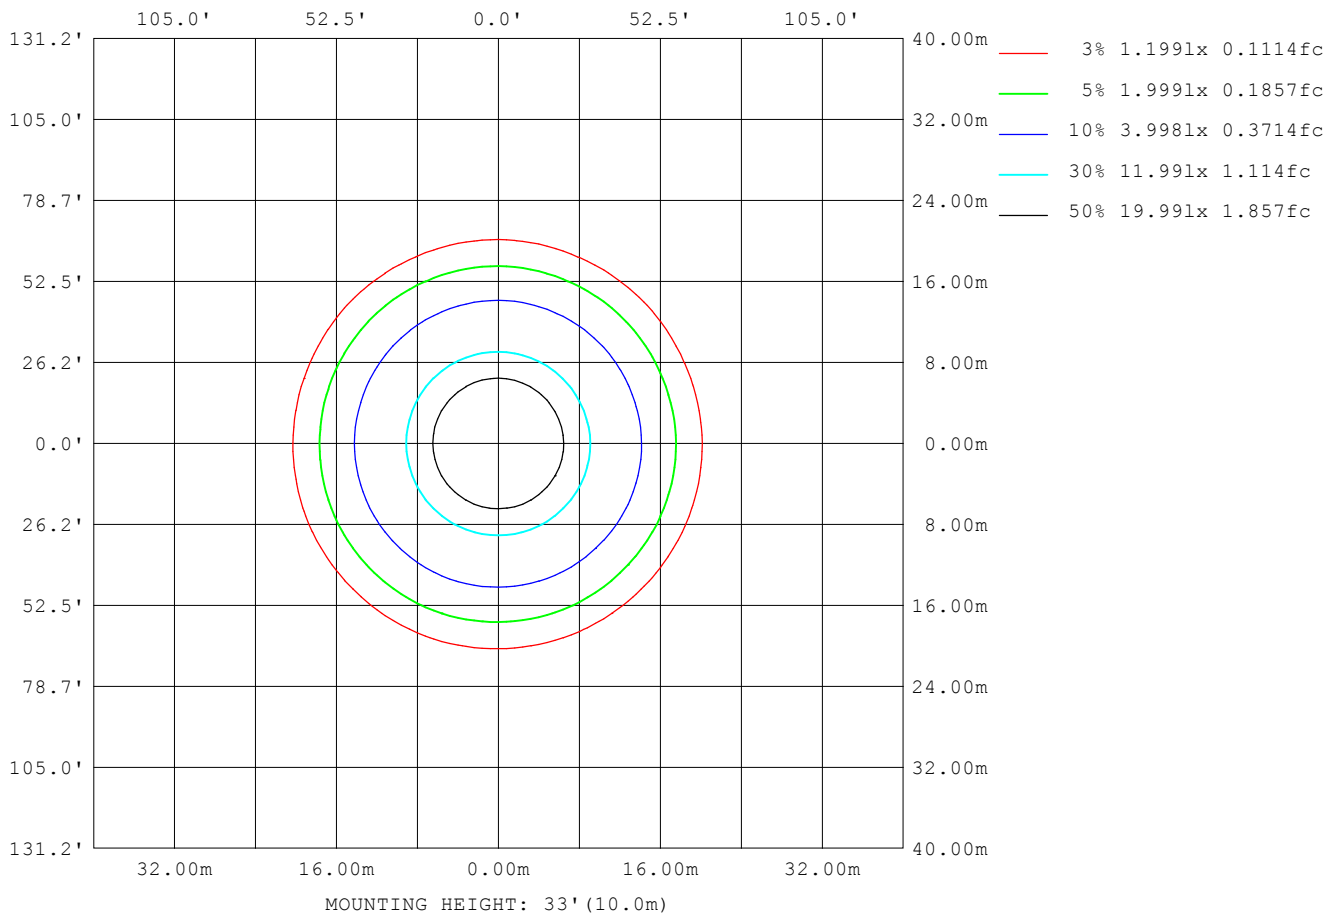

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	116911
L_0~180 (75) av	71537
L_0~180 (85) av	10923
L_90~270 (65) av	116980
L_90~270 (75) av	71791
L_90~270 (85) av	10623
L_45 (65) av	116610
L_45 (75) av	71416
L_45 (85) av	11051

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

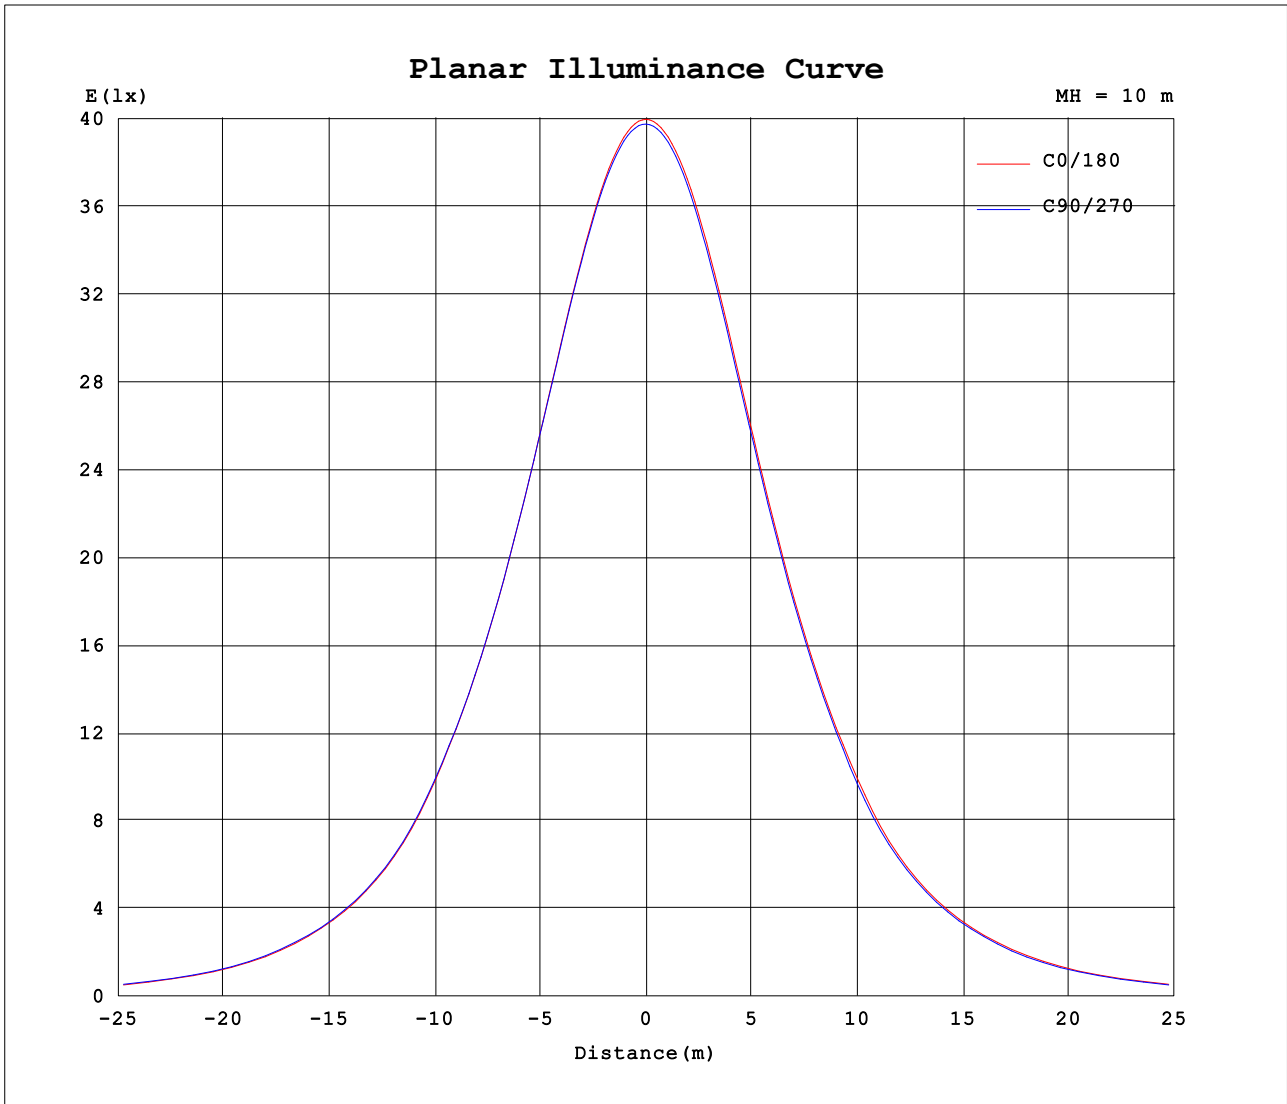

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity: 65.0%
 Test Distance: 7.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.19V I:0.3225A P:72.237W PF:0.9730 Freq:50.01Hz Lamp Flux:11051.6x1 lm		
NAME: BLP-SHBL75WB	TYPE:	WEIGHT:3.76Kg
SPEC.:	DIM.: 0.28*0.28	SERIAL No.:
MFR.: Shenzhen Brillloop Lighting	SUR.:0.16*0.16	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	3979	3979	3979	3979	3979	3979	3979	3979	3979	3979	3979	3979	3979	3979	3979	3979			
5	3968	3969	3970	3971	3972	3971	3970	3970	3967	3967	3968	3967	3966	3965	3966	3967			
10	3931	3931	3932	3936	3936	3938	3936	3935	3933	3932	3932	3929	3927	3924	3926	3926			
15	3860	3863	3863	3868	3869	3873	3871	3870	3866	3863	3862	3858	3856	3853	3854	3856			
20	3759	3763	3763	3769	3771	3775	3775	3774	3767	3764	3763	3758	3754	3749	3751	3753			
25	3628	3632	3633	3640	3643	3649	3648	3647	3638	3634	3634	3626	3622	3615	3618	3620			
30	3468	3472	3472	3482	3486	3492	3491	3490	3479	3474	3473	3464	3460	3451	3456	3458			
35	3275	3280	3281	3292	3296	3304	3302	3303	3289	3284	3282	3272	3270	3256	3262	3264			
40	3052	3057	3058	3072	3073	3087	3083	3082	3069	3063	3061	3049	3044	3030	3036	3039			
45	2764	2777	2780	2798	2800	2820	2820	2820	2801	2786	2780	2754	2745	2726	2739	2742			
50	2393	2406	2403	2426	2430	2455	2448	2447	2427	2414	2417	2391	2387	2372	2375	2375			
55	2047	2059	2054	2076	2085	2106	2097	2098	2077	2066	2071	2048	2042	2023	2028	2027			
60	1665	1677	1676	1701	1713	1736	1737	1737	1708	1697	1693	1666	1653	1632	1636	1640			
65	1246	1253	1252	1275	1287	1312	1303	1306	1284	1270	1270	1256	1244	1224	1222	1222			
70	833	834	840	860	877	895	897	897	873	863	860	844	828	813	807	809			
75	455	456	461	482	494	510	512	511	493	488	479	468	457	440	441	437			
80	163	165	167	178	188	203	197	206	193	186	183	174	164	157	152	152			
85	18.4	19.2	19.7	23.9	27.2	32.7	35.0	35.2	30.3	27.8	27.9	22.8	20.2	16.8	16.1	16.0			
90	1.86	1.88	1.84	1.84	1.82	1.82	1.84	1.82	1.73	1.73	1.73	1.72	1.77	1.77	1.81	1.78			
95	2.72	2.72	2.68	2.66	2.61	2.57	2.56	2.57	2.43	2.42	2.45	2.48	2.53	2.56	2.60	2.57			
100	3.87	3.87	3.84	3.79	3.74	3.68	3.66	3.68	3.51	3.51	3.54	3.59	3.65	3.69	3.72	3.70			
105	5.33	5.31	5.27	5.21	5.15	5.08	5.07	5.08	4.89	4.89	4.92	4.99	5.06	5.11	5.12	5.10			
110	6.96	6.92	6.90	6.83	6.76	6.68	6.66	6.68	6.48	6.49	6.51	6.58	6.64	6.70	6.72	6.69			
115	8.66	8.61	8.59	8.53	8.48	8.38	8.35	8.37	8.18	8.17	8.20	8.26	8.33	8.39	8.40	8.36			
120	10.4	10.3	10.3	10.3	10.2	10.1	10.1	10.1	9.89	9.90	9.91	9.98	10.1	10.1	10.1	10.1			
125	12.1	12.1	12.0	11.9	11.9	11.8	11.8	11.8	11.6	11.7	11.6	11.7	11.8	11.8	11.8	11.8			
130	13.8	13.7	13.7	13.5	13.5	13.4	13.4	13.5	13.3	13.3	13.3	13.4	13.4	13.5	13.5	13.4			
135	15.3	15.3	15.2	15.1	14.9	14.9	14.9	15.0	14.9	14.9	14.9	14.9	15.0	15.0	15.1	15.0			
140	16.7	16.7	16.6	16.5	16.4	16.3	16.3	16.5	16.4	16.4	16.4	16.4	16.5	16.5	16.6	16.4			
145	17.9	17.8	17.8	17.7	17.6	17.6	17.6	17.7	17.8	17.8	17.8	17.7	17.7	17.8	17.9	17.7			
150	18.9	18.9	18.8	18.8	18.7	18.7	18.7	18.8	19.0	19.0	19.0	18.9	19.0	19.0	19.1	18.9			
155	19.8	19.8	19.8	19.8	19.7	19.8	19.7	19.8	20.0	20.0	20.0	20.0	20.0	20.1	20.0	19.9			
160	20.7	20.7	20.6	20.7	20.7	20.6	20.6	20.6	20.8	20.8	20.9	20.9	20.9	20.9	20.9	20.8			
165	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.2	21.6	21.6	21.7	21.7	21.7	21.6	21.6	21.5			
170	21.7	21.8	21.7	21.8	21.8	21.8	21.8	21.7	22.2	22.2	22.3	22.2	22.3	22.1	22.1	22.1			
175	22.2	22.2	22.2	22.3	22.3	22.3	22.3	22.2	22.4	22.4	22.6	22.5	22.5	22.4	22.3	22.3			
180	22.5	22.6	22.7	22.8	22.8	22.7	22.6	22.5	22.5	22.6	22.7	22.8	22.8	22.7	22.6	22.5			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:06 February 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:65.0%
 Test Distance:7.680m [K=1.0000]
 Remarks: